

CURRENT MODE PWM CONTROLLER


The KA3882/3/4/5 are fixed PWM controller for Off-Line and DC to DC converter applications. The internal circuits include UVLO, low start up current circuit, temperature compensated reference, high gain error amplifier, current sensing comparator, and high current totempole output for driving a POWER MOSFET. Also KA3882/3/4/5 provide low start up current below 0.3mA and short shutdown delay time typ. 100ns.

The KA3882 and KA3884 have UVLO threshold of 16V(on) and 10V(off).

The KA3883 and KA3885 are 8.4V(on) and 7.6V(off).

The KA3882 and KA3883 can operate within 100% duty cycle.

The KA3884 and KA3885 within 50% by using T Flip-Flop.

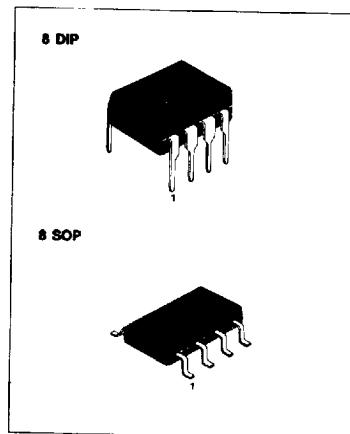

FEATURES


- Low Start Current < 0.3mA
- Operating Range Up To 500KHz
- Cycle by Cycle Current Limiting
- Under Voltage Lock Out With Hysteresis
- Short Shutdown Delay Time: typ. 100ns
- High Current Totempole Output
- Output Swing Limiting: 22V

ORDERING INFORMATION

Device	Package	Operating Temperature
KA388X	8 DIP	0~+70°C
KA388XD*	8 SOP	0~+70°C

* Under-development

BLOCK DIAGRAM

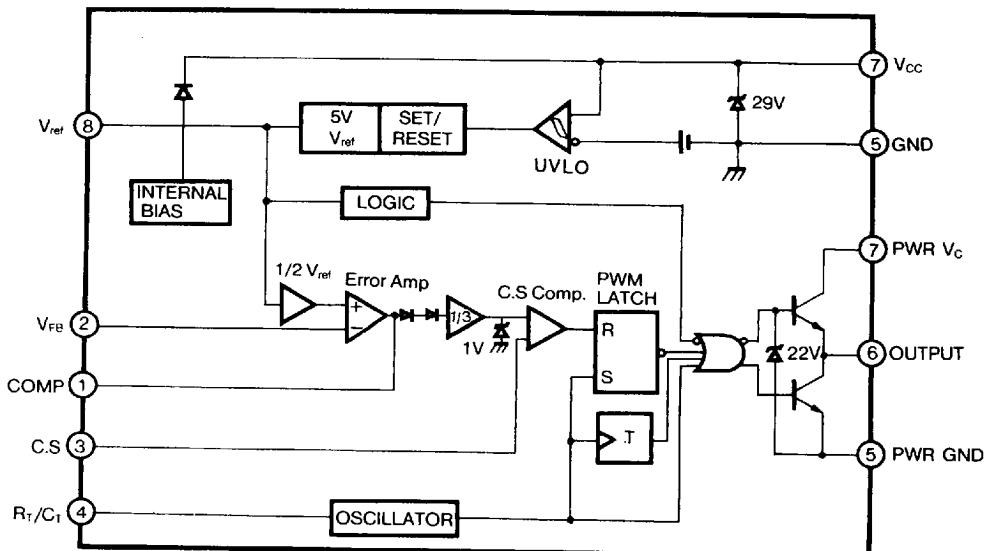

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Value	Unit
Supply Voltage	V _{CC}	28	V
Output Current	I _O	+1	A
Analog Inputs	V _(ANA)	-0.3 to 6.3	V
Error Amp. Output Sink Current	I _{SINK(EA)}	10	mA
Power Dissipation	P _D	1	W

ELECTRICAL CHARACTERISTICS

(V_{CC}=15V, R_T=10KΩ, C_T=3.3nF, T_A=0°C to + 70°C, Unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
REFERENCE SECTION						
Output Voltage	V _{REF}	T _j =25°C, I _O =1mA	4.9	5.0	5.1	V
Line Regulation	ΔV _{REF}	V _{CC} =12V to 25V	—	6	20	mV
Load Regulation	ΔV _{REF}	I _O =1mA to 20mA	—	6	25	mV
Output Short Circuit	I _{SC}	T _a =25°C	—	-100	-180	mA
OSCILLATOR SECTION						
Initial Accuracy	F _{OSC}	T _j =25°C	47	52	57	KHz
Voltage Stability	ST _V	V _{CC} =12V to 25V	—	0.2	1	%
Amplitude	V _{OSC}	V _{PIN4} , Peak to Peak	—	1.7	—	V
Discharge Current	I _{DISCHG}	T _j =25°C, Pin4=2V	7.8	8.3	8.8	mA
CURRENT SENSE SECTION						
Gain	G _V	(NOTE 2, 3)	2.85	3	3.15	V/V
Maximum Input Signal	V _{I(MAX)}	V _{PIN1} =5V(NOTE 2)	0.9	1.0	1.1	V
PSRR	PSRR	V _{CC} =12V to 25V (NOTE1, 2)	—	70	—	dB
Input Bias Current	I _{BIAS}	—	—	-2	-10	uA
Delay to Output	T _D	V _{PIN3} =0V to 2V (NOTE1)	—	100	200	ns



ELECTRICAL CHARACTERISTICS(Continued)

(V_{CC}=15V, R_T=10KΩ, C_T=3.3nF, T_A=0°C to + 70°C, Unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
ERROR AMPLIFIER SECTION						
Input Voltage	V _I	T _{PIN1} =2.5V	2.42	2.50	2.58	V
Input Bias Current	I _{BIAIS}	—	—	-0.3	-2	uA
Open Loop Gain	G _{VO}	V _O =2V to 4V (NOTE 1)	65	90	—	dB
Unity Gain Bandwidth	GBW	T _i =25°C (NOTE 1)	0.7	1	—	MHz
PSRR	PSRR	V _{CC} =12V to 25V (NOTE 1)	60	70	—	dB
Output Sink Current	I _{SINK}	V _{PIN2} =2.7V V _{PIN1} =1.1V	2	6	—	mA
Output Source Current	I _{SOURCE}	V _{PIN2} =2.3V V _{PIN1} =5.0V	-0.5	-0.8	—	mA
Output High Voltage	V _{OH}	V _{PIN2} =2.3V R ₁ =15ΩK to GND	5	6	—	V
Output Low Voltage	V _{OL}	V _{PIN2} =2.7V R ₁ =15ΩK to Pin8	—	0.8	1.1	V
OUTPUT SECTION						
Output Low Level	V _{OL}	I _{SINK} =20mA	—	0.1	0.4	V
		I _{SINK} =200mA	—	1.5	2.2	V
Output High Level	V _{OH}	I _{SOURCE} =20mA	13	13.5	—	V
		I _{SOURCE} =200mA	12	13.5	—	V
Rise Time	t _R	T _i =25°C, C ₁ =1nF (NOTE 1)	—	40	100	ns
Fall Time	t _F	T _i =25°C, C ₁ =1nF (NOTE 1)	—	40	100	ns
Output Voltage Swing Limit	V _{OLIM}	V _{CC} =27V,C ₁ =1nF	—	22	—	V
UNDER VOLTAGE LOCKOUT SECTION						
Start Threshold	V _{TH}	KA3882/4	15	16	17	V
		KA3883/5	7.8	8.4	9.0	V
Min.Operating Voltage (After turn on)	V _{TL}	KA3882/4	9	10	11	V
		KA3883/5	7.0	7.6	8.2	V

ELECTRICAL CHARACTERISTICS(Continued)(V_{CC}=15V, R_T=10KΩ, C_T=3.3nF, T_A=0°C to + 70°C unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
PWM SECTION						
Maximum Duty Cycle	D _{MAX}	KA3882/3	94	96	100	%
		KA3884/5	47	48	50	%
Minimum Duty Cycle	D _{MIN}	—	—	—	0	%
TOTAL STANDBY CURRENT						
Start-Up Current	I _{ST}	—	—	0.2	0.4	mA
Operating Supply Current	I _{CC}	V _{PIN2} =V _{PIN3} =0V	—	11	17	mA
Vcc Zener Voltage	V _Z	I _{CC} =25mA	—	29	—	V

* Adjust Vcc above the start threshold before setting at 15V

NOTE 1. These parameters, although guaranteed, are not 100% tested in production.

2. Parameter measured at trip point of latch with V2=0V.

3. Gain defined as: G_v=ΔV_{PIN1}/ΔV_{PIN2}(V_{PIN2}=0 to 0.8V)