


IGBT MODULE (S series) 1200V / 50A / PIM

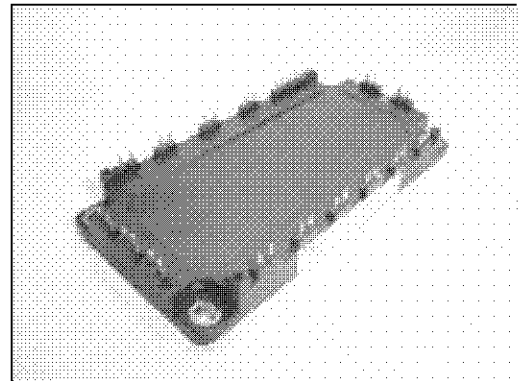

■ Features

- Low $V_{CE(sat)}$
- Compact package
- P.C. board mount
- Converter diode bridge, Dynamic brake circuit

■ Applications

- Inverter for motor drive
- AC and DC servo drive amplifier
- Uninterruptible power supply

■ Maximum ratings and characteristics

● Absolute maximum ratings ($T_c=25^\circ\text{C}$ unless without specified)

Item	Symbol	Condition	Rating	Unit		
Inverter	Collector-Emitter voltage	V_{CES}	1200	V		
	Gate-Emitter voltage	V_{GES}	± 20	V		
	Collector current	I_C	Continuous	$T_c=25^\circ\text{C}$ $T_c=80^\circ\text{C}$	75 50	
			1ms	$T_c=25^\circ\text{C}$ $T_c=80^\circ\text{C}$	150 100	
		$-I_C$			50	A
		Collector power dissipation	P_C	1 device	360	W
Brake	Collector-Emitter voltage	V_{CES}	1200	V		
	Gate-Emitter voltage	V_{GES}	± 20	V		
	Collector current	I_C	Continuous	$T_c=25^\circ\text{C}$ $T_c=80^\circ\text{C}$	35 25	
			1ms	$T_c=25^\circ\text{C}$ $T_c=80^\circ\text{C}$	70 50	
		Collector power dissipation		P_C	1 device	180
		Repetitive peak reverse voltage	V_{RRM}		1200	V
Converter	Repetitive peak reverse voltage	V_{RRM}	1600	V		
	Average output current	I_O	50Hz/60Hz sine wave	50		
	Surge current (Non-Repetitive)	I_{FSM}	$T_j=150^\circ\text{C}$, 10ms	520		
	I^2t (Non-Repetitive)	I^2t	half sine wave	1352		
Operating junction temperature	T_j		+150	$^\circ\text{C}$		
Storage temperature	T_{stg}		-40 to +125	$^\circ\text{C}$		
Isolation voltage	between terminal and copper base *2	V_{iso}	AC : 1 minute	AC 2500		
	between thermistor and others *3			AC 2500		
Mounting screw torque			3.5 *1	N·m		

*1 Recommendable value : 2.5 to 3.5 N·m (M5)

*2 All terminals should be connected together when isolation test will be done.

*3 Terminal 8 and 9 should be connected together. Terminal 1 to 7 and 10 to 24 should be connected together and shorted to copper base.

● Electrical characteristics (T_j=25°C unless otherwise specified)


Item	Symbol	Condition	Characteristics			Unit			
			Min.	Typ.	Max.				
Inverter	Zero gate voltage collector current	I _{GES}	V _{CE} =1200V, V _{GE} =0V			1.0	mA		
	Gate-Emitter leakage current	I _{GES}	V _{CE} =0V, V _{GE} =±20V			0.2	μA		
	Gate-Emitter threshold voltage	V _{GE(th)}	V _{CE} =20V, I _C =50mA			5.5	7.2	8.5	V
	Collector-Emitter saturation voltage	V _{CE(sat)}	V _{GE} =15V, I _C =50A	chip	2.1		V		
				terminal	2.3	2.7			
	Input capacitance	C _{ies}	V _{GE} =0V, V _{CE} =10V, f=1MHz			6000		pF	
	Turn-on time	t _{on}	V _{CC} =600V I _C =50A V _{GE} =±15V		0.35	1.2	μs		
					0.25	0.6			
					0.1				
	Turn-off	t _{off}	R _G =24Ω		0.45	1.0			
				0.08	0.3				
Forward on voltage	V _F	I _F =50A	chip	2.3		V			
			terminal	2.5	3.3				
Reverse recovery time of FRD	t _{rr}	I _F =50A			0.35		μs		
Brake	Zero gate voltage collector current	I _{GES}	V _{CE(s)} =1200V, V _{GE} =0V			1.0	mA		
	Gate-Emitter leakage current	I _{GES}	V _{CE} =0V, V _{GE} =±20V			0.2	μA		
	Collector-Emitter saturation voltage	V _{CE(sat)}	I _C =25A, V _{GE} =15V	chip	2.1		V		
				terminal	2.25	2.7			
	Turn-on time	t _{on}	V _{CC} =600V I _C =25A V _{GE} =±15V		0.35	1.2	μs		
					0.25	0.6			
	Turn-off time	t _{off}	R _G =51Ω		0.45	1.0			
					0.08	0.3			
	Reverse current	I _{RRM}	V _R =1200V			1.0		mA	
	Forward on voltage	V _{FM}	I _F =50A	chip	1.1		V		
terminal				1.2	1.5				
Reverse current	I _{RRM}	V _R =1600V			1.0		mA		
Thermistor	Resistance	R	T=25°C			5000	Ω		
			T=100°C			465		495	520
	B value	B	T=25/50°C			3305	3375	3450	K

● Thermal resistance Characteristics







Item	Symbol	Condition	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance (1 device)	R _{th(j-c)}	Inverter IGBT			0.35	°C/W
		Inverter FWD			0.75	
		Brake IGBT			0.69	
		Converter Diode			0.50	
Contact thermal resistance *	R _{th(c-f)}	With thermal compound			0.05	







* This is the value which is defined mounting on the additional cooling fin with thermal compound






■ Equivalent Circuit Schematic






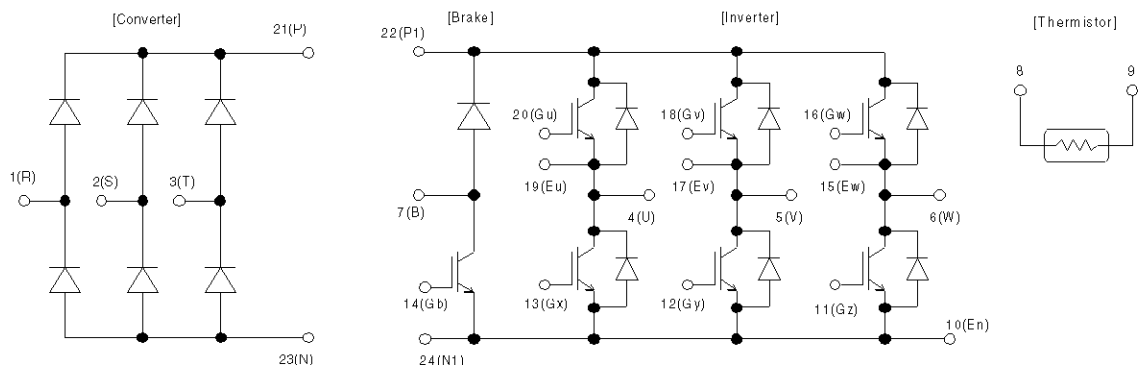


Characteristics (Representative)

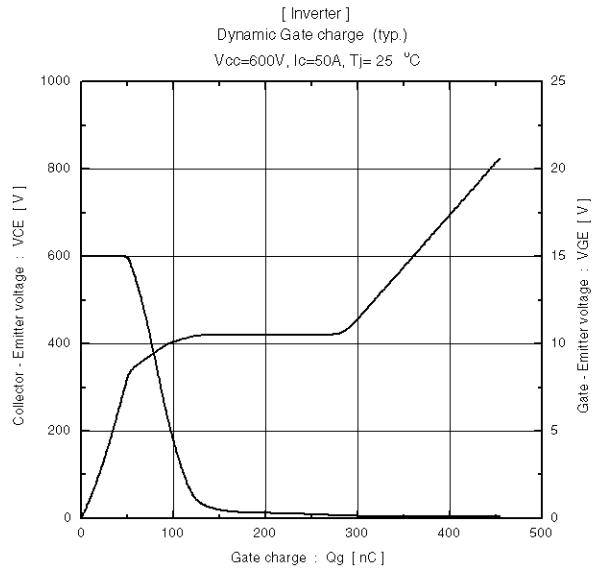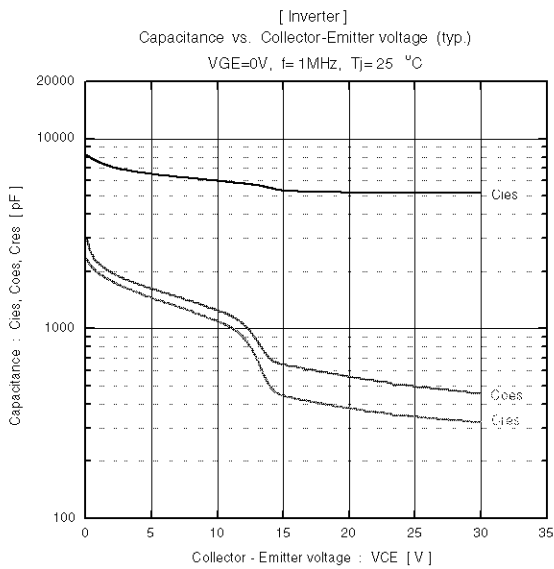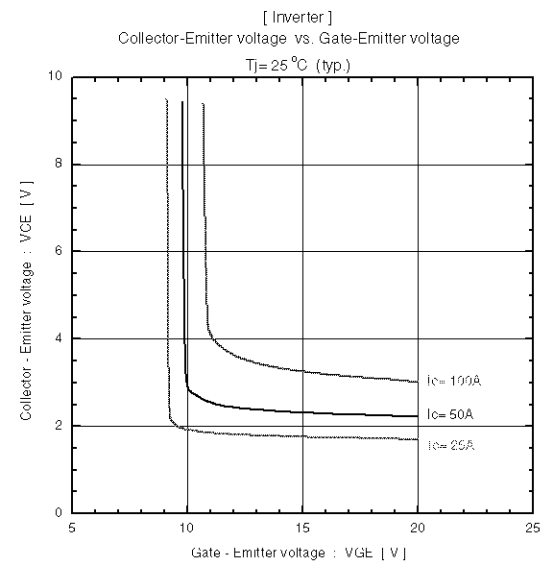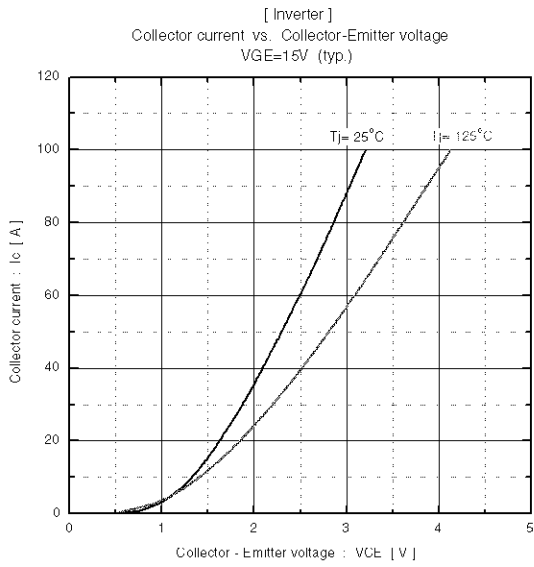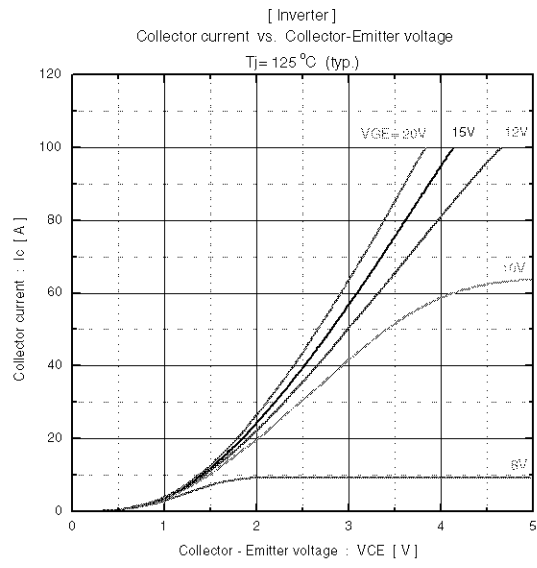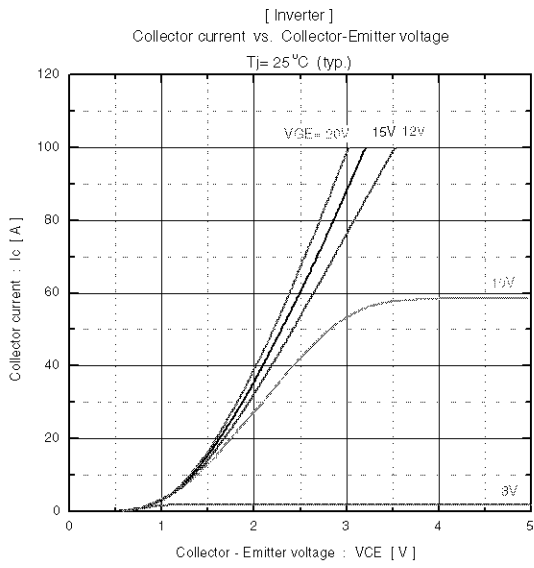


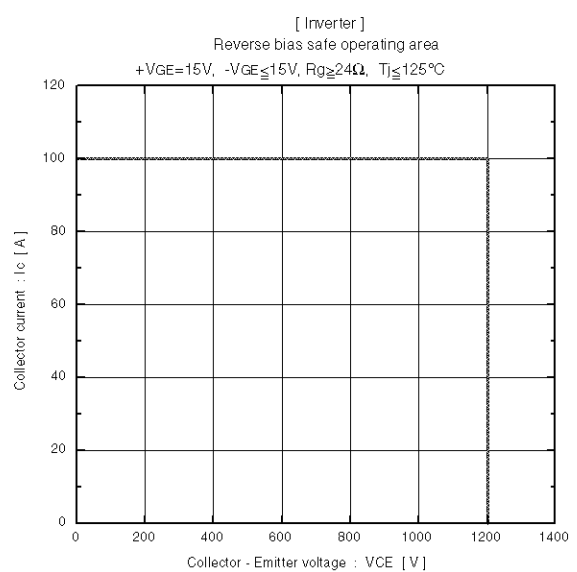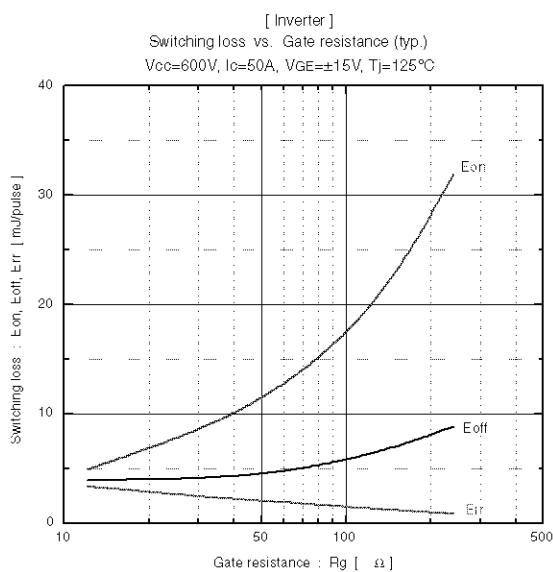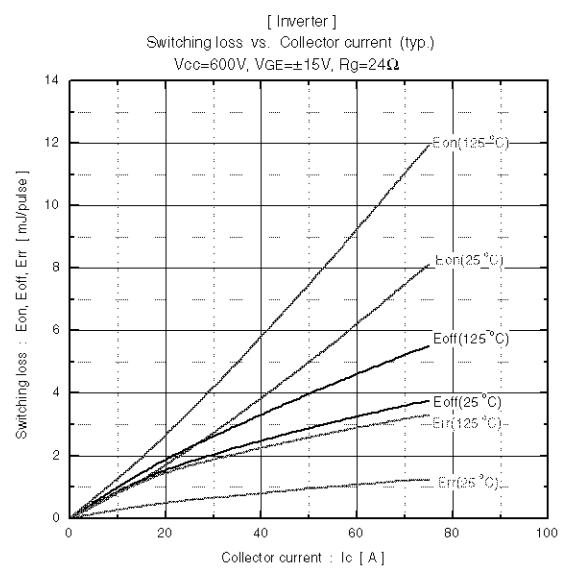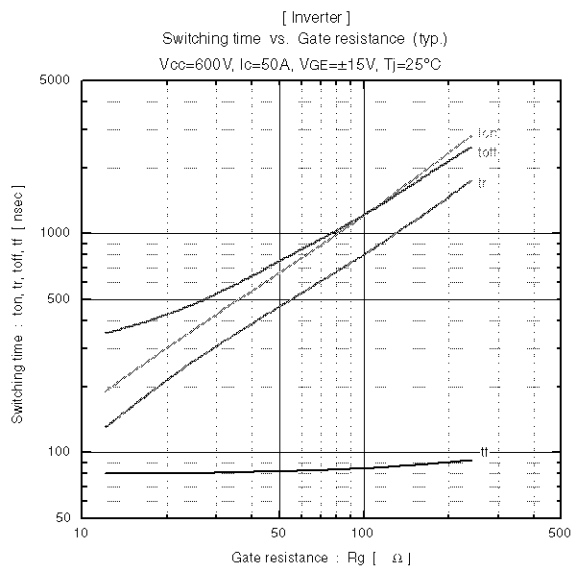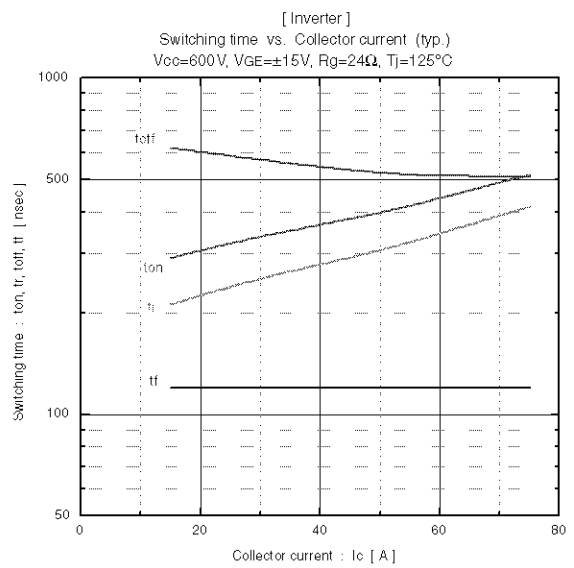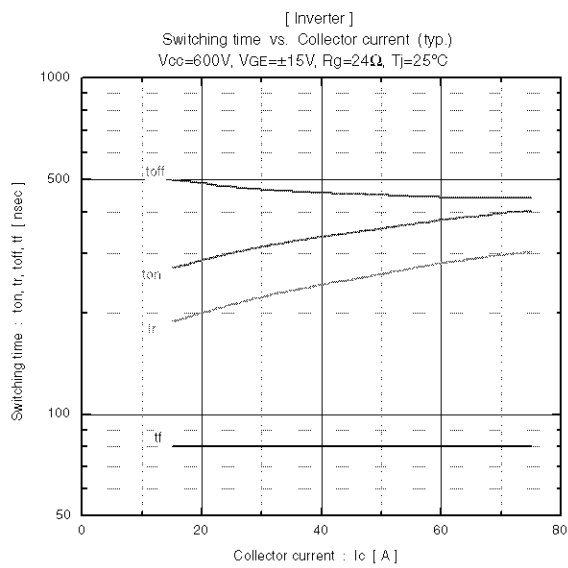

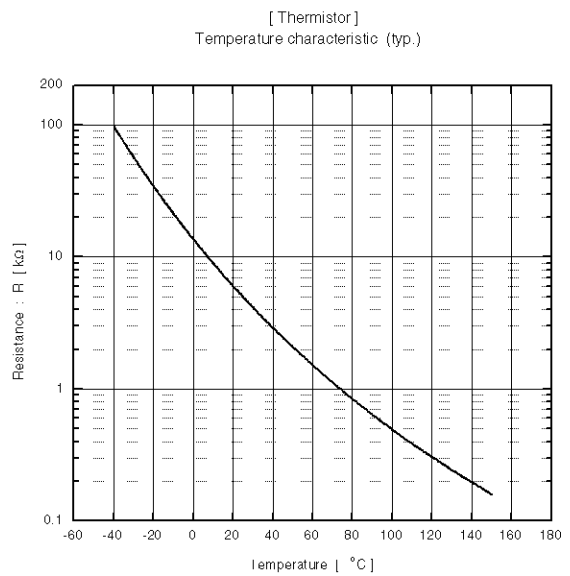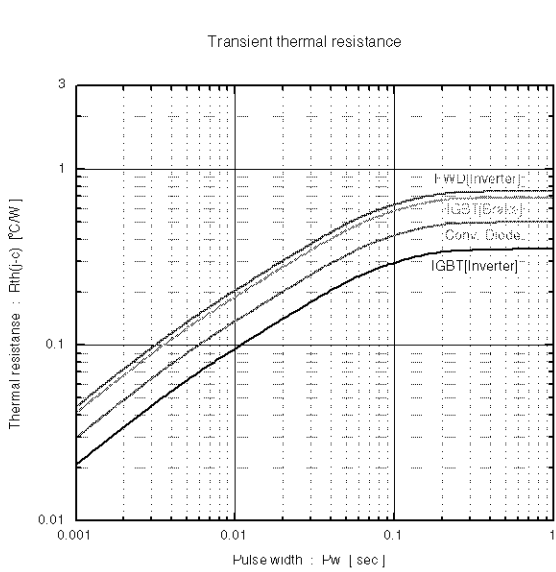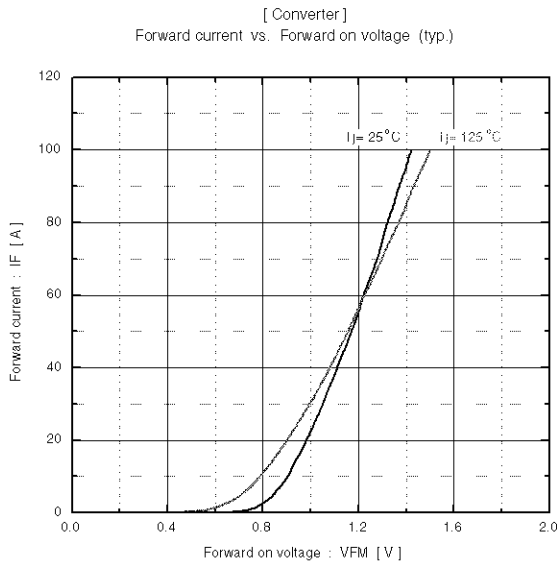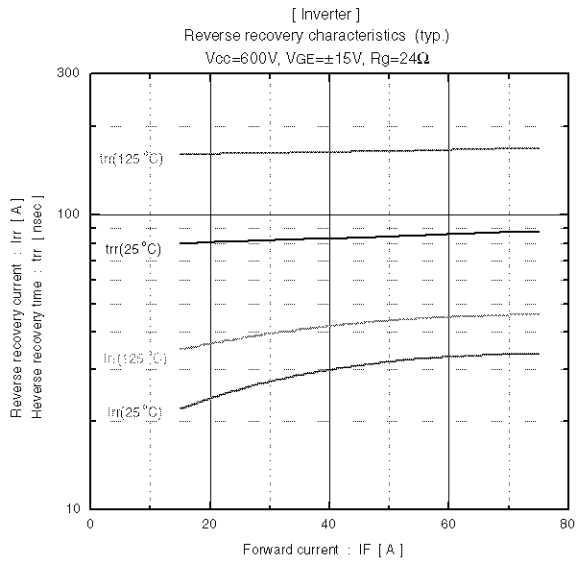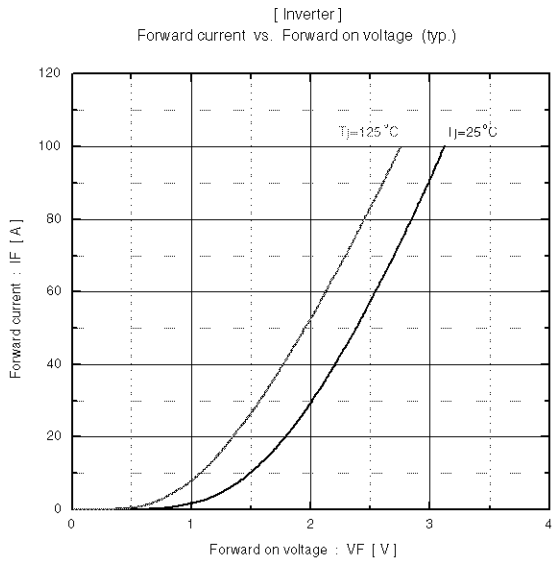

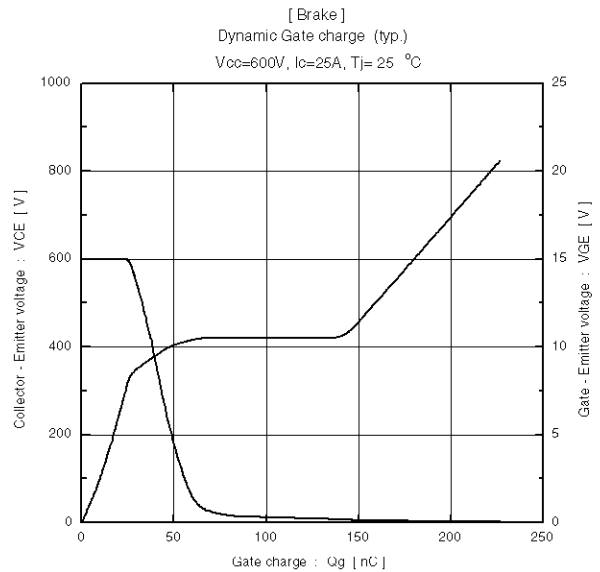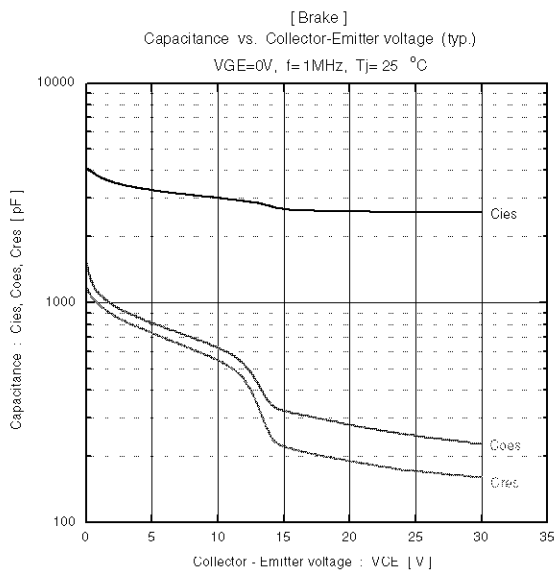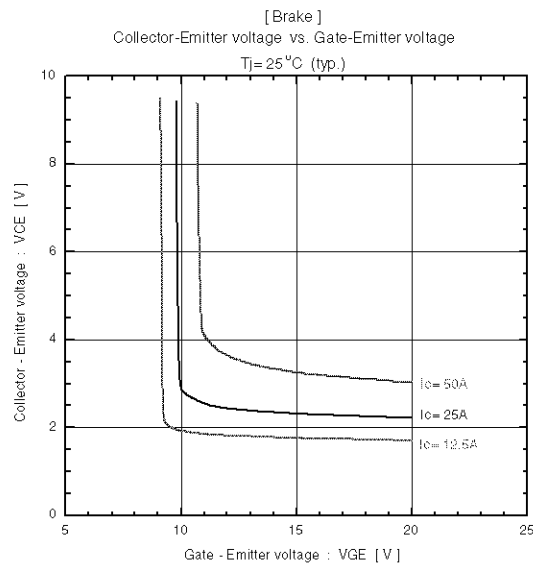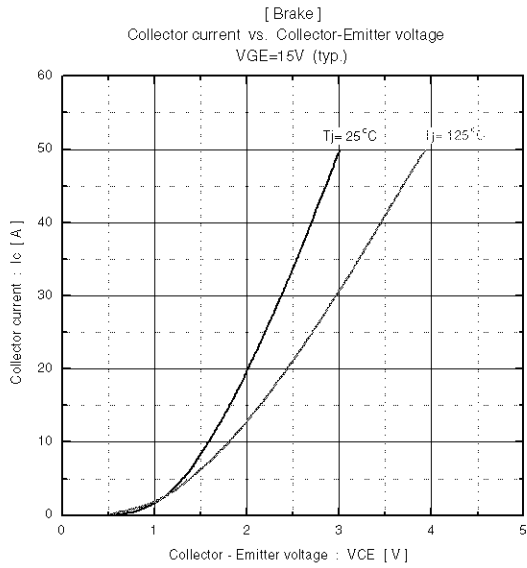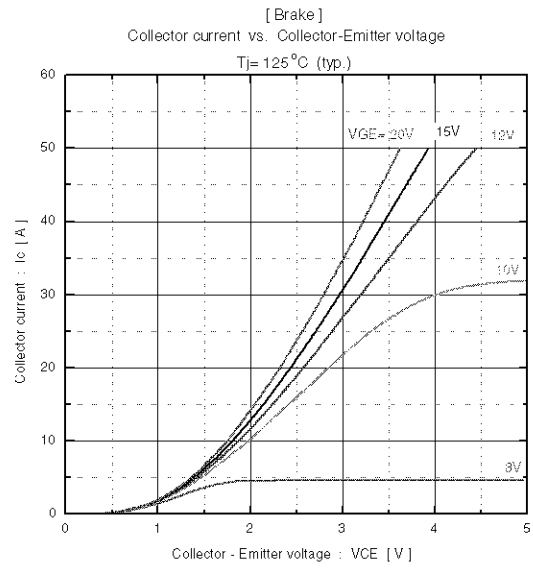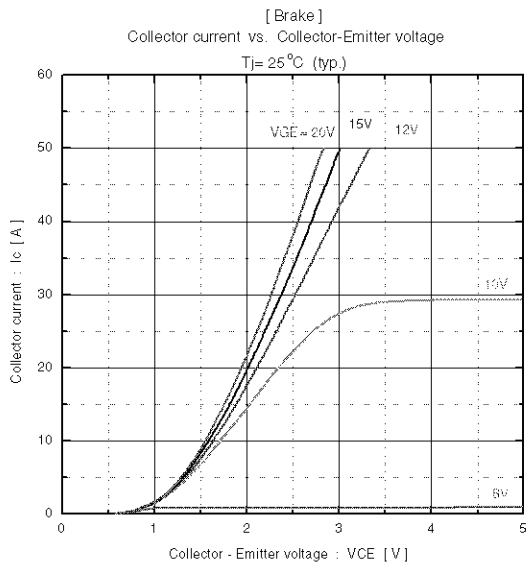

■ Outline Drawings, mm

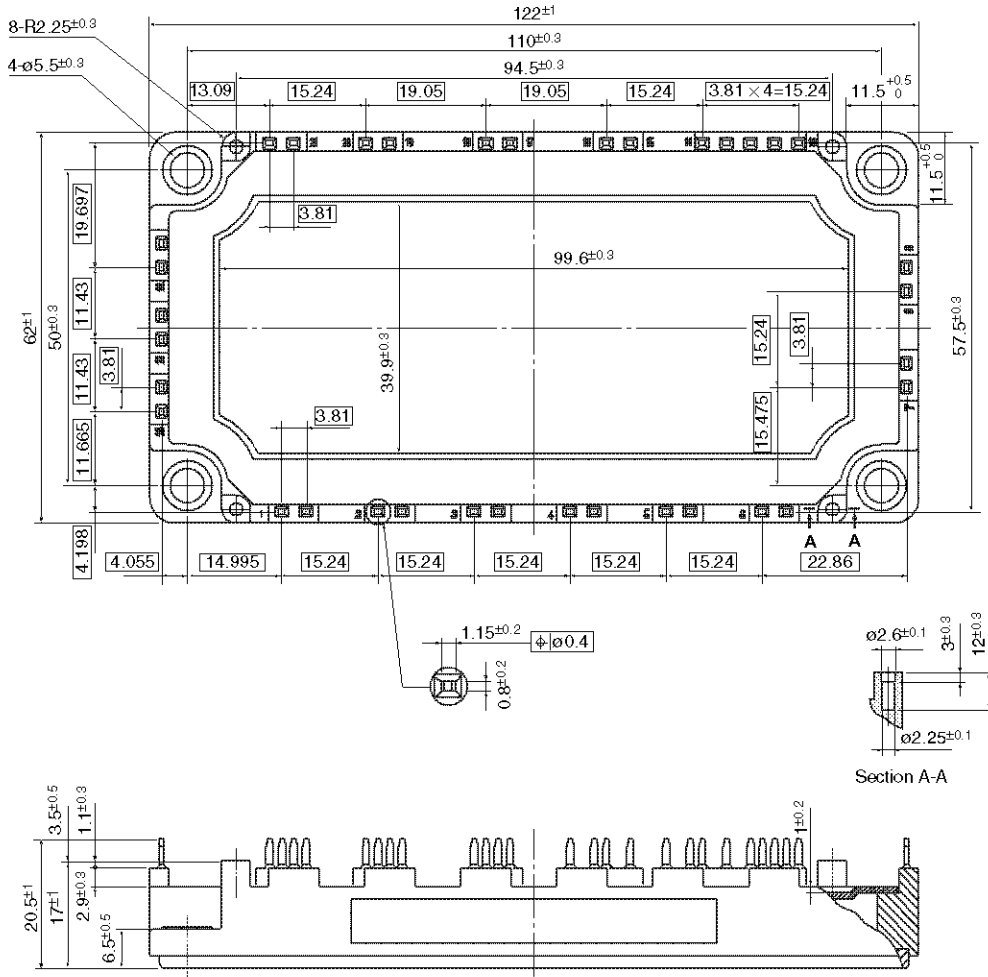

□ Shows theory dimensions