

# SCHOTTKY BARRIER DIODE

## PRODUCT SUMMARY

SOD-123 Plastic-Encapsulate Diode

## FEATURES

For use in low voltage, high frequency inverters  
Free wheeling, and polarity protection applications.

 **Pb-free; RoHS-compliant**



**MARKING: B5817W: SJ**  
**B5818W: SK**  
**B5819W: SL**

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Single Diode @ $T_A=25^\circ\text{C}$


Parameter	Symbol	B5817W	B5818W	B5819W	Unit
Non-Repetitive Peak reverse voltage	$V_{RM}$	20	30	40	V
Peak repetitive Peak reverse voltage	$V_{RRM}$	20	30	40	V
Working Peak Reverse Voltage	$V_{RWM}$				
DC Blocking Voltage	$V_R$				
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	V
Average Rectified Output Current	$I_O$	1			A
Peak forward surge current @ $\approx 8.3\text{ms}$	$I_{FSM}$	25			A
Repetitive Peak Forward Current	$I_{FRM}$	625			mA
Power Dissipation	$P_d$	250			mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	500			K/W
Storage temperature	$T_{STG}$	-65~+150			$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** (T<sub>amb</sub>=25 °C unless otherwise specified)


Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Reverse breakdown voltage	V <sub>(BR)</sub>	I <sub>R</sub> = 1mA B5817W B5818W B5819W	20 30 40		v
Reverse voltage leakage current	I <sub>R</sub>	V <sub>R</sub> =20V B5817W V <sub>R</sub> =30V B5818W V <sub>R</sub> =40V B5819W		1	mA
Forward voltage	V <sub>F</sub>	B5817W I <sub>F</sub> =1A		0.45	v
		B5817W I <sub>F</sub> =3A		0.75	
		B5818W I <sub>F</sub> =1A		0.55	v
		B5818W I <sub>F</sub> =3A		0.875	
		B5819W I <sub>F</sub> =1A		0.6	v
		B5819W I <sub>F</sub> =3A		0.9	
Diode capacitance	C <sub>D</sub>	V <sub>R</sub> =4V, f=1MHz		120	pF

## TYPICAL CHARACTERISTICS


**Fig. 1 - Forward Current Derating Curve**

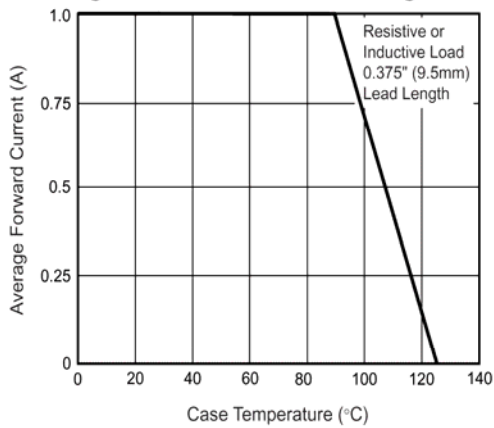


**Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current**

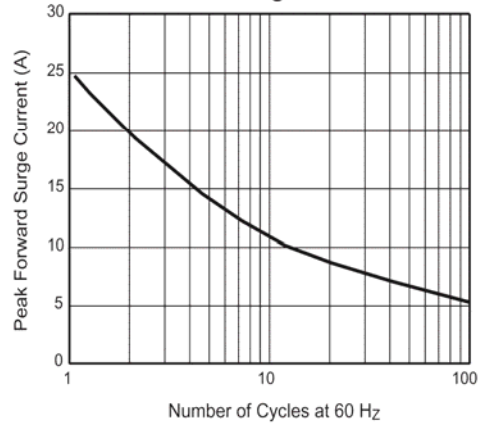


**Fig. 3 - Typical Instantaneous Forward Characteristics**

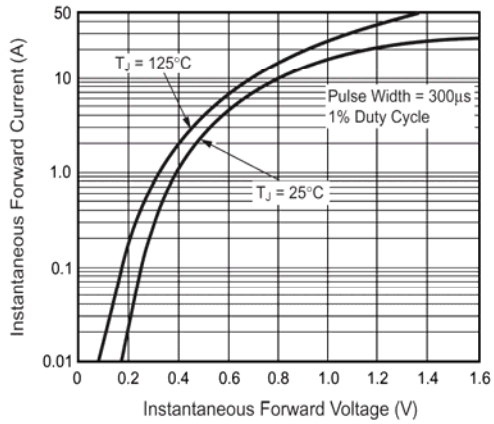


**Fig. 4 - Typical Reverse Characteristics**

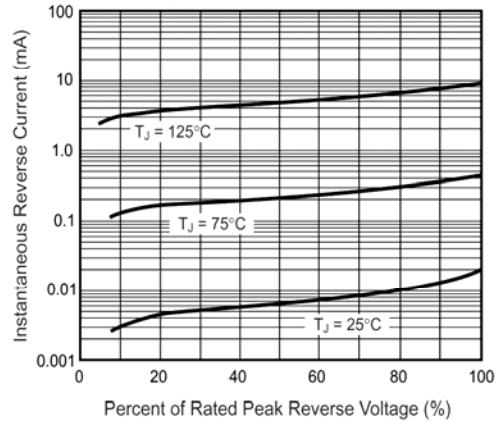

**Fig. 5 - Typical Junction Capacitance**

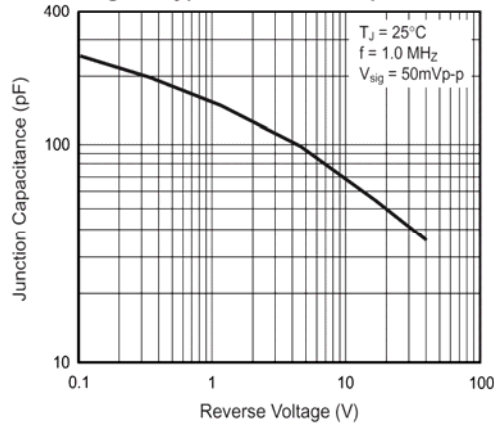

**Fig. 6 - Typical Transient Thermal Impedance**

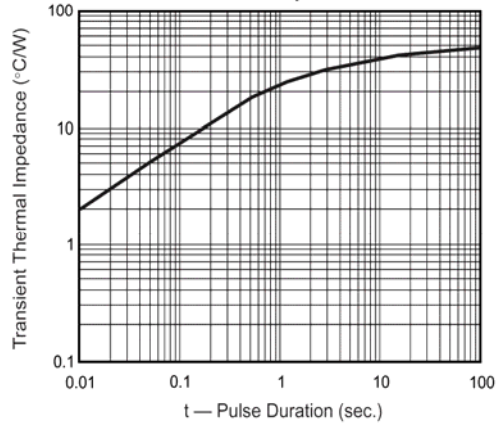

Information furnished by Silicon Standard Corporation is believed to be accurate and reliable. However, Silicon Standard Corporation makes no guarantee or warranty, expressed or implied, as to the reliability, accuracy, timeliness or completeness of such information and assumes no responsibility for its use, or for infringement of any patent or other intellectual property rights of third parties that may result from its use. Silicon Standard reserves the right to make changes as it deems necessary to any products described herein for any reason, including without limitation enhancement in reliability, functionality or design. No license is granted, whether expressly or by implication, in relation to the use of any products described herein or to the use of any information provided herein, under any patent or other intellectual property rights of Silicon Standard Corporation or any third parties.