

## Introduction

The Spartan™-IIE 1.8V Field-Programmable Gate Array family gives users high performance, abundant logic resources, and a rich feature set, all at an exceptionally low price. The five-member family offers densities ranging from 50,000 to 300,000 system gates, as shown in [Table 1](#). System performance is supported beyond 200 MHz.

Spartan-IIE devices deliver more gates, I/Os, and features per dollar than other FPGAs by combining advanced process technology with a streamlined architecture based on the proven Virtex™-E platform. Features include block RAM (to 64K bits), distributed RAM (to 98,304 bits), 19 selectable I/O standards, and four DLLs (Delay-Locked Loops). Fast, predictable interconnect means that successive design iterations continue to meet timing requirements.

The Spartan-IIE family is a superior alternative to mask-programmed ASICs. The FPGA avoids the initial cost, lengthy development cycles, and inherent risk of conventional ASICs. Also, FPGA programmability permits design upgrades in the field with no hardware replacement necessary (impossible with ASICs).

## Features

- Second generation ASIC replacement technology
  - Densities as high as 6,912 logic cells with up to 300,000 system gates
  - Streamlined features based on Virtex-E architecture
  - Unlimited in-system reprogrammability
  - Very low cost

- System level features
  - SelectRAM+™ hierarchical memory:
    - 16 bits/LUT distributed RAM
    - Configurable 4K-bit true dual-port block RAM
    - Fast interfaces to external RAM
  - Fully 3.3V PCI compliant to 64 bits at 66 MHz and CardBus compliant
  - Low-power segmented routing architecture
  - Full readback ability for verification/observability
  - Dedicated carry logic for high-speed arithmetic
  - Efficient multiplier support
  - Cascade chain for wide-input functions
  - Abundant registers/latches with enable, set, reset
  - Four dedicated DLLs for advanced clock control
  - Four primary low-skew global clock distribution nets
  - IEEE 1149.1 compatible boundary scan logic
- Versatile I/O and packaging
  - Low cost packages available in all densities
  - Family footprint compatibility in common packages
  - 19 high-performance interface standards, including LVDS and LVPECL
  - Up to 120 differential I/O pairs that can be input, output, or bidirectional
  - Zero hold time simplifies system timing
- Fully supported by powerful Xilinx ISE development system
  - Fully automatic mapping, placement, and routing
  - Integrated with design entry and verification tools

Table 1: Spartan-IIE FPGA Family Members

| Device   | Logic Cells | Typical System Gate Range (Logic and RAM) | CLB Array (R x C) | Total CLBs | Maximum Available User I/O | Maximum Differential I/O Pairs | Distributed RAM Bits | Block RAM Bits |
|----------|-------------|---|-------------------|------------|----------------------------|--------------------------------|----------------------|----------------|
| XC2S50E  | 1,728       | 23,000 - 50,000                           | 16 x 24           | 384        | 182                        | 84                             | 24,576               | 32K            |
| XC2S100E | 2,700       | 37,000 - 100,000                          | 20 x 30           | 600        | 202                        | 86                             | 38,400               | 40K            |
| XC2S150E | 3,888       | 52,000 - 150,000                          | 24 x 36           | 864        | 263                        | 114                            | 55,296               | 48K            |
| XC2S200E | 5,292       | 71,000 - 200,000                          | 28 x 42           | 1,176      | 289                        | 120                            | 75,264               | 56K            |
| XC2S300E | 6,912       | 93,000 - 300,000                          | 32 x 48           | 1,536      | 329                        | 120                            | 98,304               | 64K            |

## General Overview

The Spartan-IIE family of FPGAs have a regular, flexible, programmable architecture of Configurable Logic Blocks (CLBs), surrounded by a perimeter of programmable Input/Output Blocks (IOBs). There are four Delay-Locked Loops (DLLs), one at each corner of the die. Two columns of block RAM lie on opposite sides of the die, between the CLBs and the IOB columns. These functional elements are interconnected by a powerful hierarchy of versatile routing channels (see [Figure 1](#)).


Spartan-IIE FPGAs are customized by loading configuration data into internal static memory cells. Unlimited reprogramming cycles are possible with this approach. Stored values in these cells determine logic functions and interconnections implemented in the FPGA. Configuration data can be read from an external serial PROM (master serial mode), or written into the FPGA in slave serial, slave parallel, or Boundary Scan modes. The Xilinx XC17S00A PROM family is recommended for serial configuration of Spartan-IIE FPGAs. The XC18V00 reprogrammable PROM family is recommended for parallel or serial configuration.

Spartan-IIE FPGAs are typically used in high-volume applications where the versatility of a fast programmable solution adds benefits. Spartan-IIE FPGAs are ideal for shortening product development cycles while offering a cost-effective solution for high volume production.

Spartan-IIE FPGAs achieve high-performance, low-cost operation through advanced architecture and semiconductor technology. Spartan-IIE devices provide system clock rates beyond 200 MHz. Spartan-IIE FPGAs offer the most cost-effective solution while maintaining leading edge performance. In addition to the conventional benefits of high-volume programmable logic solutions, Spartan-IIE FPGAs also offer on-chip synchronous single-port and dual-port RAM (block and distributed form), DLL clock drivers, programmable set and reset on all flip-flops, fast carry logic, and many other features.

## Spartan-IIE Family Compared to Spartan-II Family

- Higher density and more I/O
- Higher performance
- Unique pinouts in cost-effective packages
- Differential signaling
  - LVDS, Bus LVDS, LVPECL
- $V_{CCINT} = 1.8V$ 
  - Lower power
  - 5V tolerance with 100 $\Omega$  external resistor
  - 3V tolerance directly
- PCI, LVTTTL, and LVCMOS2 input buffers powered by  $V_{CCO}$  instead of  $V_{CCINT}$
- Unique larger bitstream

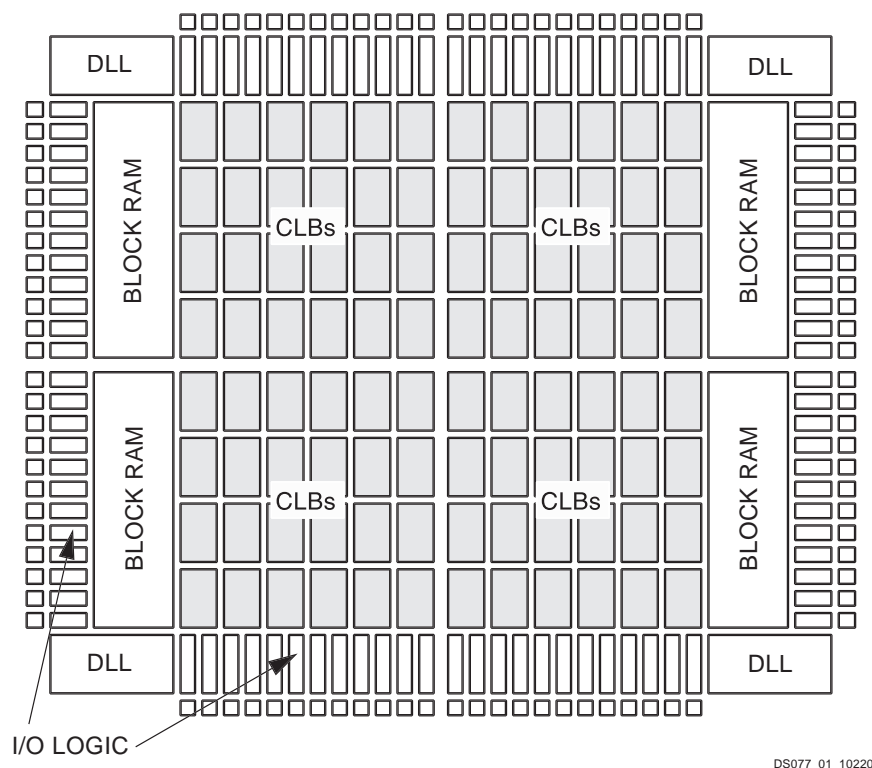

DS077\_01\_102201

Figure 1: Basic Spartan-IIE Family FPGA Block Diagram

## Spartan-IIE Product Availability

Table 2 shows the package and speed grades available for Spartan-IIE family devices. Table 3 shows the maximum user I/Os available on the device and the number of user I/Os available for each device/package combination.

Table 2: Spartan-IIE Package and Speed Grade Availability

| Device   | Pins | 144          | 208          | 256            | 456            |
|----------|------|--------------|--------------|----------------|----------------|
|          | Type | Plastic TQFP | Plastic PQFP | Fine Pitch BGA | Fine Pitch BGA |
|          | Code | TQ144        | PQ208        | FT256          | FG456          |
| XC2S50E  | -6   | C, I         | C, I         | C, I           | -              |
|          | -7   | (C)          | (C)          | (C)            | -              |
| XC2S100E | -6   | C, I         | C, I         | C, I           | C, I           |
|          | -7   | (C)          | (C)          | (C)            | (C)            |
| XC2S150E | -6   | -            | (C, I)       | (C, I)         | (C, I)         |
|          | -7   | -            | (C)          | (C)            | (C)            |
| XC2S200E | -6   | -            | C, I         | C, I           | C, I           |
|          | -7   | -            | (C)          | (C)            | (C)            |
| XC2S300E | -6   | -            | C, I         | C, I           | C, I           |
|          | -7   | -            | (C)          | (C)            | (C)            |


**Notes:**

1. C = Commercial,  $T_J = 0^\circ$  to  $+85^\circ\text{C}$ ; I = Industrial,  $T_J = -40^\circ\text{C}$  to  $+100^\circ\text{C}$
2. Parentheses indicate product not yet released. Contact sales for availability.

Table 3: Spartan-IIE User I/O Chart

| Device   | Maximum User I/O | Available User I/O According to Package Type |       |       |       |
|----------|------------------|--|-------|-------|-------|
|          |                  | TQ144  | PQ208 | FT256 | FG456 |
| XC2S50E  | 182              | 102  | 146   | 182   | -     |
| XC2S100E | 202              | 102  | 146   | 182   | 202   |
| XC2S150E | 263              | -  | 146   | 182   | 263   |
| XC2S200E | 289              | -  | 146   | 182   | 289   |
| XC2S300E | 329              | -  | 146   | 182   | 329   |

## Ordering Information

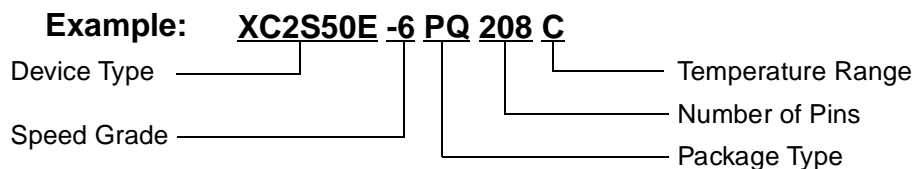

## Device Ordering Options

| Device   | Speed Grade |                      | Package Type / Number of Pins |                          | Temperature Range (T <sub>J</sub> ) |                 |
|----------|-------------|----------------------|-------------------------------|--------------------------|-------------------------------------|-----------------|
| XC2S50E  | -6          | Standard Performance | TQ144                         | 144-pin Plastic Thin QFP | C = Commercial                      | 0°C to +85°C    |
| XC2S100E | -7          | Higher Performance   | PQ208                         | 208-pin Plastic QFP      | I = Industrial                      | -40°C to +100°C |
| XC2S150E |             |                      | FT256                         | 256-ball Fine Pitch BGA  |                                     |                 |
| XC2S200E |             |                      | FG456                         | 456-ball Fine Pitch BGA  |                                     |                 |
| XC2S300E |             |                      |                               |                          |                                     |                 |

## Revision History

| Version No. | Date     | Description             |
|-------------|----------|-------------------------|
| 1.0         | 11/15/01 | Initial Xilinx release. |

## The Spartan-II E Family Data Sheet

DS077-1, *Spartan-II E 1.8V FPGA Family: Introduction and Ordering Information* (Module 1)

DS077-2, *Spartan-II E 1.8V FPGA Family: [Functional Description](#)* (Module 2)

DS077-3, *Spartan-II E 1.8V FPGA Family: [DC and Switching Characteristics](#)* (Module 3)

DS077-4, *Spartan-II E 1.8V FPGA Family: [Pinout Tables](#)* (Module 4)