

## NX5032GA / NX5032GB

For OA / AV


### ■ Features

A small surface-mount type crystal unit, suitable for OA (office automation) and AV (audiovisual) applications.

Compatible with low frequencies starting from 8MHz.

(NX5032GA : 5.0 × 3.2 × 1.3mm typ.)

- Excellent electrical performance, ideal for OA and AV applications.
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.
- NX5032GA supports low frequencies starting from 8MHz.
- NX5032GB supports low height mounting (product height: 1.0mm typ.).

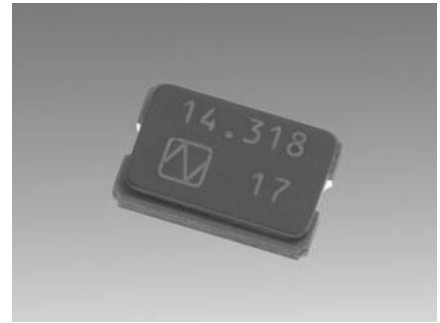

RoHS Compliant  
Directive 2002/95/EC

### ■ Specifications

Item	Model	NX5032GA	NX5032GB
Frequency Range		8 to 55MHz	12 to 55MHz
Overtone Order		Fundamental	Fundamental
Frequency Tolerance (25 ±3°C)		±20 × 10 <sup>-6</sup>	±20 × 10 <sup>-6</sup>
Temperature Characteristics (with reference to +25°C)		±30 × 10 <sup>-6</sup>	±30 × 10 <sup>-6</sup>
Operating Temperature Range		-10 to +70°C	-10 to +70°C
Equivalent Series Resistance		Refer to *1	Refer to *1
Drive Level		50μW(Max:500μW)	50μW(Max:500μW)
Load Capacitance		8pF	8pF

The above specifications are standard for this NDK product.

Custom-made specifications such as load capacitance and temperature characteristics are also available.

Please contact NDK sales with your enquiries.


### ■ How to Specify an Order

When ordering our products, specify them with an "Ordering Code" that consists of the following :

Model name - Frequency (Max : 9 digits) M - Number for specifying an order      Example NX5032GA-12.000M-STD-CSK-4

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (<http://www.ndk.com/>).

### ■ Dimensions

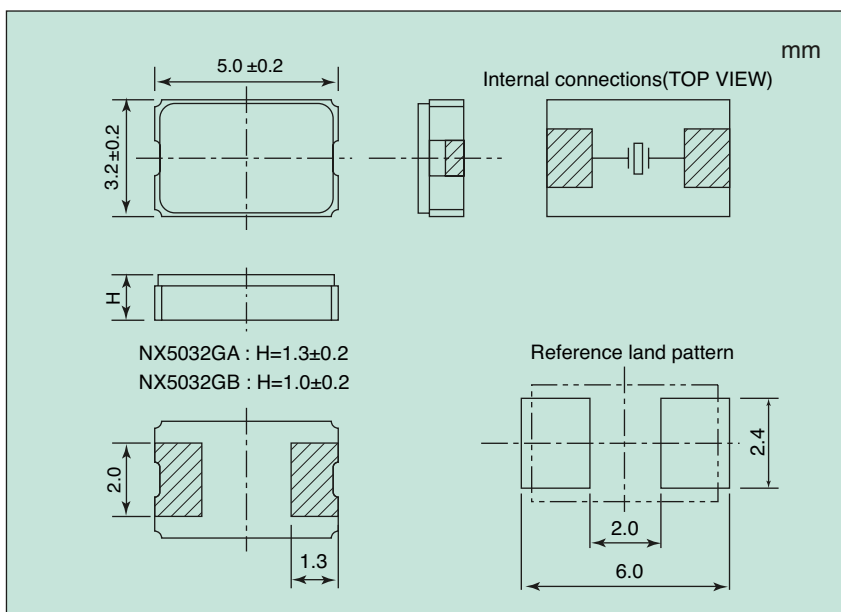

\*1 Equivalent Series Resistance

Frequency (MHz) (Range)	Equivalent Series Resistance max.[Ω]
8 to 9.5	300
9.5 to 10	150
10 to 20	120
20 to 30	70
30 to 55	50