


# Solid Tantalum Chip Capacitors

## TANTAMOUNT<sup>®</sup>, Low Profile, Conformal Coated, Maximum CV

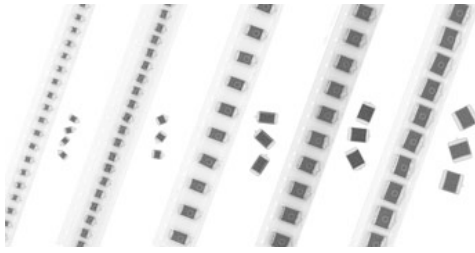

### FEATURES

- New extended range offerings.
- 1.0mm to 2.5mm height.
- Terminations: Lead (Pb)-free (2) standard.
- Low Impedance
- 8mm, 12mm and 24mm tape and reel packaging available per EIA-481-1 and reeling per IEC 286-3. 7" [178mm] standard. 13" [330mm] available.
- Case code compatibility with EIA 535BAAC and CECC 30801 molded chips.

### PERFORMANCE CHARACTERISTICS

**Operating Temperature:** - 55°C to + 85°C. (To + 125°C with voltage derating.)

**Capacitance Range:** 1.0µF to 3300µF

**Capacitance Tolerance:** ±10%, ±20% standard.

**Voltage Rating:** 4 WVDC to 35 WVDC

### ORDERING INFORMATION

592D TYPE	106 CAPACITANCE	X0 CAPACITANCE TOLERANCE	010 DC VOLTAGE RATING @ + 85°C	B CASE CODE	2 TERMINATION	T REEL SIZE AND PACKAGING
This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.		<b>X0 = ± 20%</b> <b>X9 = ± 10%</b>	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 volts).	See Ratings and Case Codes Table.	<b>2 = 100% Tin</b> <b>4 = Gold Plated</b>	<b>T = Tape and Reel</b> <b>7" [178mm] Reel</b> <b>W = 13" [330mm] Reel</b>

**Note:** Preferred Tolerance and reel sizes are in bold.

We reserve the right to supply higher voltage ratings and tighter capacitance tolerance capacitors in the same case size. Voltage substitutions will be marked with the higher voltage rating.

### DIMENSIONS in inches [millimeters]



CASE CODE	L (Max.)	W	H	A	B	D (Ref.)	J (Max.)
A	0.146 [3.7]	0.072 ± 0.012 [1.8 ± 0.3]	0.048 ± 0.012 [1.2 ± 0.3]	0.031 ± 0.012 [0.80 ± 0.30]	0.087 ± 0.016 [2.2 ± 0.4]	0.115 [2.9]	0.004 [0.1]
B	0.158 [4.0]	0.110 ± 0.012-0.016 [2.8 + 0.3-0.4]	0.047 ± 0.012 [1.2 ± 0.3]	0.031 ± 0.012 [0.80 ± 0.30]	0.097 ± 0.016 [2.5 ± 0.4]	0.139 [3.5]	0.004 [0.1]
C	0.281 [7.1]	0.126 ± 0.012 [3.2 ± 0.3]	0.047 ± 0.012 [1.2 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.30]	0.180 ± 0.024 [4.4 ± 0.6]	0.238 [6.0]	0.004 [0.1]
D	0.298 [7.5]	0.170 ± 0.012 [4.3 ± 0.3]	0.047 ± 0.012 [1.2 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.30]	0.180 ± 0.024 [4.6 ± 0.6]	0.254 [6.4]	0.004 [0.1]
R	0.285 [7.2]	0.235 ± 0.012 [6.0 ± 0.3]	0.047 ± 0.012 [1.2 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.30]	0.180 ± 0.024 [4.6 ± 0.6]	0.246 [6.2]	0.004 [0.1]
S	0.126 ± 0.012 [3.2 ± 0.3]	0.063 ± 0.012 [1.6 ± 0.3]	0.040 ± 0.012 [1.0 ± 0.3]	0.031 ± 0.012 [0.8 ± 0.3]	0.079 ± 0.012 [2.0 ± 0.3]	0.087 [2.2]	0.004 [0.1]
T	0.158 [4.0]	0.116 ± 0.012 [2.8 ± 0.3]	0.079 [2.0] Max.	0.031 ± 0.012 [0.8 ± 0.3]	0.097 ± 0.016 [2.5 ± 0.4]	0.139 [3.5]	0.004 [0.1]
U	0.281 [7.1]	0.126 ± 0.012 [3.2 ± 0.3]	0.079 [2.0] Max.	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.024 [4.6 ± 0.6]	0.238 [6.0]	0.004 [0.1]
V	0.298 [7.5]	0.170 ± 0.012 [4.3 ± 0.3]	0.079 [2.0] Max.	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.024 [4.6 ± 0.6]	0.254 [6.4]	0.004 [0.1]
W	0.285 [7.2]	0.235 ± 0.012 [6.0 ± 0.3]	0.079 [2.0] Max.	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.024 [4.6 ± 0.6]	0.246 [6.2]	0.004 [0.1]
X	0.575 [14.5]	0.290 ± 0.010 [7.37 ± 0.25]	0.079 [2.0] Max.	0.050 ± 0.016 [1.3 ± 0.4]	0.470 ± 0.024 [11.9 ± 0.6]	0.524 [13.2]	0.004 [0.1]
Y	0.575 [14.5]	0.290 ± 0.010 [7.37 ± 0.25]	0.098 [2.5] Max.	0.051 ± 0.016 [1.3 ± 0.4]	0.470 ± 0.024 [11.9 ± 0.6]	0.524 [13.2]	0.004 [0.1]

**Note:** The anode termination (D less B) will be a minimum of 0.012" [0.3mm].



RATINGS AND CASE CODES														
μF	4 V		6.3 V		10 V		16 V		20 V		25 V		35 V	
	STD	EXT	STD	EXT	STD	EXT	STD	EXT	STD	EXT	STD	EXT	STD	EXT
1													B	A
1.5													B	
2.2											B	A	C	B*
3.3											C	B	D	C
4.7								A	B	A	C		R	
6.8							B	A	C	B	D	C	R	D
10					B	A	C	B	D	B	R	B/D		R
15			B	A			D	B*	R	C	U*	R		
22	B	A		A/B	C	B	D/T	C	R/U*/T	D	U*/V*			
33		B	B/C	A/S	D/T*	C	R/T	C/D	V*	R				
47	C	B*	C/D	A/B	R/T	D	U	R/T*						
68	D	B/C	D/T/R	B/C	D/R/U*	C/T	V	C*						
100	R/T	C/D	D/R	B/C/T	D/U	R	V	C*/D/U						
150	D/R	C/T	D/U	R	V	U	W							
220	U/V	R	V	D/R/U	D	V/W		W						
330	V	R/U	W	R/U/V	V	W								
470	W	D/U/V		V/U/W										
680		V/W		W										
1000		W		X/W										
1500		X		X/Y										
2200		X/Y		X/Y*										
3300				Y										

\* Contact factory for availability

STANDARD / EXTENDED RATINGS							
CAPACITANCE (μF)	CASE CODE	PART NUMBER	Max. DCL @ + 25°C (μA)	Max. DF @ + 25°C 120 Hz (%)	Max. ESR @ + 25°C 100kHz (Ohms)	Max. RIPPLE 100kHz Irms (Amps)	
4 WVDC @ + 85°C, SURGE = 5.2 V . . . 2.7 WVDC @ + 125°C, SURGE = 3.4 V							
22	A	592D226X_004A2T	0.9	6	2.40	0.16	
22	B	592D226X_004B2T	0.9	6	1.60	0.22	
33	B	592D336X_004B2T	1.3	6	1.60	0.22	
47*	B*	592D476X_004B2T*	1.9*	6*	1.5*	0.23*	
47	C	592D476X_004C2T	1.9	6	0.40	0.5	
68	B	592D686X_004B2T	2.7	6	1.40	0.24	
68	C	592D686X_004C2T	2.7	6	0.35	0.53	
68	D	592D686X_004D2T	2.7	6	0.27	0.68	
100	C	592D107X_004C2T	4	8	0.35	0.53	
100	D	592D107X_004D2T	4	8	0.26	0.69	
100	R	592D107X_004R2T	4	8	0.20	0.87	
100	T	592D107X_004T2T	4	8	0.45	0.42	
150	C	592D157X_004C2T	6	8	0.36	0.52	
150	D	592D157X_004D2T	6	8	0.25	0.71	
150	R	592D157X_004R2T	6	8	0.20	0.87	
150	T	592D157X_004T2T	6	8	0.45	0.42	
220	R	592D227X_004R2T	8.3	8	0.20	0.87	
220	V	592D227X_004V2T	8.3	8	0.20	0.78	
220	U	592D227X_004U2T	8.3	8	0.19	0.76	
330	R	592D337X_004R2T	13.2	8	0.18	0.91	
330	U	592D337X_004U2T	13.2	8	0.15	0.86	
330	V	592D337X_004V2T	13.2	8	0.12	1.08	
470	D	592D477X_004D2T	18.8	8	0.14	0.94	
470	U	592D477X_004U2T	18.8	8	0.10	1.05	
470	V	592D477X_004V2T	18.8	8	0.10	1.18	
470	W	592D477X_004W2T	18.8	10	0.10	1.32	
680	V	592D687X_004V2T	27.2	12	0.10	1.18	
680	W	592D687X_004W2T	27.2	12	0.10	1.32	
1000	W	592D108X_004W2T	40	14	0.200	0.94	
1500	X	592D158X_004X2T	60	20	0.04	2.1	
2200	Y	592D228X_004Y2T	88	25	0.04	2.3	
2200	X	592D228X_004X2T	88	25	0.55	2.3	

\*Preliminary values, contact factory for availability. For 10% tolerance, specify "9"; for 20% tolerance, change to "0". **Extended range ratings are in bold print.**



## STANDARD / EXTENDED RATINGS

CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER	Max. DCL @ + 25°C ( $\mu$ A)	Max. DF @ + 25°C 120 Hz (%)	Max. ESR @ + 25°C 100kHz (Ohms)	Max. RIPPLE 100kHz Irms (Amps)
<b>6.3 WVDC @ + 85°C, SURGE = 8 V . . . 4 WVDC @ + 125°C, SURGE = 5 V</b>						
15	A	592D156X 6R3A2T	0.9	6	2.50	0.15
15	B	592D156X 6R3B2T	0.9	6	1.70	0.22
22	A	592D226X 6R3A2T	1.4	6	1.5	0.23
22	A	592D226X 6R3A2T13H**	1.4	6	1.5	0.2
22	B	592D226X 6R3B2T	1.4	6	1.5	0.23
33	A	592D336X 6R3A2T	2.1	6	1.70	0.32
33	B	592D336X 6R3B2T	2.1	6	1.40	0.24
33	C	592D336X 6R3C2T	2.1	6	0.40	0.5
33	S	592D336X 6R3S2T	2.1	8	1.3	0.28
33	S	592D336X 6R3S2T12H**	2.1	10	2.0	0.17
47	A	592D476X 6R3A2T	3	8	1.40	0.21
47	B	592D476X 6R3B2T	3	8	1.40	0.21
47	C	592D476X 6R3C2T	3	6	0.40	0.5
47	D	592D476X 6R3D2T	3	6	0.30	0.65
68	B	592D686X 6R3B2T	4.3	6	0.38	0.46
68	B	592D686X 6R3B2T13H**	4.3	8	0.60	0.36
68	C	592D686X 6R3C2T	4.3	6	0.38	0.51
68	D	592D686X 6R3D2T	4.3	6	0.27	0.68
68	R	592D686X 6R3R2T	4.3	6	0.20	0.87
68	T	592D686X 6R3T2T	4.3	6	0.50	0.4
100	B	592D107X 6R3B2T15H**	6.3	10	1.0	0.28
100	C	592D107X 6R3C2T	6.3	8	0.38	0.51
100	D	592D107X 6R3D2T	6.3	8	0.26	0.69
100	R	592D107X 6R3R2T	6.3	8	0.20	0.87
100	T	592D107X 6R3T2T	6.3	8	0.45	0.42
150	D	592D157X 6R3D2T	9.5	8	0.25	0.71
150	R	592D157X 6R3R2T	9.5	8	0.20	0.87
150	U	592D157X 6R3U2T	9.5	8	0.19	0.76
220	D	592D227X 6R3D2T	13.9	8	0.22	0.75
220	R	592D227X 6R3R2T	13.9	8	0.18	0.91
220	U	592D227X 6R3U2T	13.9	8	0.15	0.86
220	V	592D227X 6R3V2T	13.9	8	0.12	1.08
330	C	592D337X 6R3C2T16H**	20.8	10	0.15	0.81
330	R	592D337X 6R3R2T	20.8	8	0.18	0.91
330	U	592D337X 6R3U2T	20.8	8	0.10	1.05
330	V	592D337X 6R3V2T	20.8	8	0.10	1.18
330	W	592D337X 6R3W2T	20.8	8	0.10	1.32
470	U	592D477X 6R3U2T	29.6	14	0.10	1.05
470	V	592D477X 6R3V2T	29.6	10	0.10	1.18
470	W	592D477X 6R3W2T	29.6	10	0.10	1.32
680	R	592D687X 6R3R2T16H**	42.8	14	0.13	1.16
680	W	592D687X 6R3W2T	42.8	10	0.100	1.32
1000	W	592D108X 6R3W2T	63	20	0.2	0.94
1000	X	592D108X 6R3X2T	63	16	0.04	2.1
1500	Y	592D158X 6R3Y2T	95	20	0.035	2.3
1500	X	592D158X 6R3X2T	95	25	0.045	1.97
2200*	Y*	592D228X 6R3Y2T*	139*	35*	0.055*	1.80*
2200	X	592D228X 6R3X2T	139	35	0.055	1.80
3300	Y	592D338X 6R3Y2T	208	35	0.055	1.80
<b>10 WVDC @ + 85°C, SURGE = 13 V . . . 7 WVDC @ + 125°C, SURGE = 8 V</b>						
10	A	592D106X 010A2T	1	6	2.60	0.15
10	B	592D106X 010B2T	1	6	1.70	0.22
22	B	592D226X 010B2T	2.2	6	1.50	0.23
22	C	592D226X 010C2T	2.2	6	0.40	0.50
33	C	592D336X 010C2T	3.3	6	0.40	0.50
33	D	592D336X 010D2T	3.3	6	0.30	0.65
33*	T*	592D336X 010T2T*	3.3*	6*	0.50*	0.40*
47	D	592D476X 010D2T	4.7	6	0.27	0.68
47	R	592D476X 010R2T	4.7	6	0.20	0.87
47	T	592D476X 010T2T	4.7	6	0.50	0.40
68	C	592D686X 010C2T	6.8	6	0.14	0.84
68	D	592D686X 010D2T	6.8	6	0.27	0.68
68	R	592D686X 010R2T	6.8	6	0.20	0.87
68	T	592D686X 010T2T	6.8	6	0.45	0.42
68*	U*	592D686X 010U2T*	6.8*	6*	0.25*	0.66*
100	D	592D107X 010D2T	10	8	0.10	1.11
100	U	592D107X 010U2T	10	8	0.19	0.76
100	R	592D107X 010R2T	10.0	8	0.22	0.83
150	U	592D157X 010U2T	15	8	0.17	0.80
150	V	592D157X 010V2T	15	8	0.14	1.00
220	V	592D227X 010V2T	22	8	0.12	1.08
220	W	592D227X 010W2T	22	8	0.10	1.32
330*	V*	592D337X 010V2T*	33*	8*	0.10*	1.18*
330	W	592D337X 010W2T	33	8	0.10	1.32

\*\* xyH indicates maximum height in (mm), i.e., 1.5 max (H) = 15Hmm

\*Preliminary values, contact factory for availability. For 10% tolerance, specify "9"; for 20% tolerance, change to "0". **Extended range ratings are in bold print.**

\*Voltage range under development.



<b>STANDARD / EXTENDED RATINGS</b>						
CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER	Max. DCL @ + 25°C ( $\mu$ A)	Max. DF @ + 25°C 120 Hz (%)	Max. ESR @ + 25°C 100kHz (Ohms)	Max. RIPPLE 100kHz Irms (Amps)
<b>16 WVDC @ + 85°C, SURGE = 20 V . . . 10 WVDC @ + 125°C, SURGE = 12 V</b>						
4.7	<b>A</b>	<b>592D475X_016A2T</b>	<b>0.8</b>	<b>6</b>	<b>3.50</b>	<b>0.13</b>
6.8	<b>A</b>	<b>592D685X_016A2T</b>	<b>1.1</b>	<b>6</b>	<b>3.50</b>	<b>0.13</b>
6.8	B	592D685X_016B2T	1.1	6	1.80	0.21
10	<b>B</b>	<b>592D106X_016B2T</b>	<b>1.6</b>	<b>6</b>	<b>1.60</b>	<b>0.22</b>
10	C	592D106X_016C2T	1.6	6	1.00	0.32
15*	<b>B*</b>	<b>592D156X_016B2T*</b>	<b>2.4*</b>	<b>6*</b>	<b>1.4*</b>	<b>0.24*</b>
15	D	592D156X_016D2T	2.4	6	0.50	0.50
22	<b>C</b>	<b>592D226X_016C2T</b>	<b>3.5</b>	<b>6</b>	<b>0.50</b>	<b>0.46</b>
22	D	592D226X_016D2T	3.5	6	0.40	0.60
22	T	592D226X_016T2T	3.5	6	0.6	0.36
33	<b>C</b>	<b>592D336X_016C2T</b>	<b>5.3</b>	<b>6</b>	<b>0.25</b>	<b>0.66</b>
33	<b>D</b>	<b>592D336X_016D2T</b>	<b>5.3</b>	<b>6</b>	<b>0.30</b>	<b>0.62</b>
33	R	592D336X_016R2T	5.3	6	0.27	0.75
33	T	592D336X_016T2T	5.3	6	0.6	0.36
47	<b>R</b>	<b>592D476X_016R2T</b>	<b>7.5</b>	<b>6</b>	<b>0.25</b>	<b>0.77</b>
47	T	592D476X_016T2T	7.5	6	0.45	0.42
47	U	592D476X_016U2T	7.5	6	0.25	0.66
68*	<b>C*</b>	<b>592D686X_016C2T*</b>	<b>10.9*</b>	<b>6*</b>	<b>0.50*</b>	<b>1.20*</b>
68	<b>U</b>	<b>592D686X_016U2T</b>	<b>10.9</b>	<b>6</b>	<b>0.25</b>	<b>0.66</b>
68	V	592D686X_016V2T	10.9	6	0.17	0.91
100*	<b>C*</b>	<b>592D107X_016C2T*</b>	<b>16*</b>	<b>8*</b>	<b>0.30*</b>	<b>1.80*</b>
100	<b>D</b>	<b>592D107X_016D2T</b>	<b>16</b>	<b>8</b>	<b>0.15</b>	<b>0.97</b>
100	<b>U</b>	<b>592D107X_016U2T</b>	<b>16</b>	<b>8</b>	<b>0.15</b>	<b>0.97</b>
100	V	592D107X_016V2T	16	8	0.15	0.97
150	W	592D157X_016W2T	24	8	0.1	1.32
220	<b>W</b>	<b>592D227X_016W2T</b>	<b>35.2</b>	<b>8</b>	<b>0.2</b>	<b>0.94</b>
<b>20 WVDC @ + 85°C, SURGE = 26 V . . . 13 WVDC @ + 125°C, SURGE = 16 V</b>						
4.7	<b>A</b>	<b>592D475X_020A2T</b>	<b>0.9</b>	<b>6</b>	<b>3.80</b>	<b>0.13</b>
4.7	B	592D475X_020B2T	0.9	6	3.20	0.16
6.8	<b>B</b>	<b>592D685X_020B2T</b>	<b>1.4</b>	<b>6</b>	<b>3.10</b>	<b>0.16</b>
6.8	C	592D685X_020C2T	1.4	6	1.10	0.30
10	<b>B</b>	<b>592D106X_020B2T</b>	<b>2</b>	<b>6</b>	<b>3.00</b>	<b>0.16</b>
10	D	592D106X_020D2T	2	6	0.50	0.48
15	<b>C</b>	<b>592D156X_020C2T</b>	<b>3</b>	<b>6</b>	<b>0.60</b>	<b>0.42</b>
15	R	592D156X_020R2T	3	6	0.40	0.65
22	<b>D</b>	<b>592D226X_020D2T</b>	<b>4.4</b>	<b>6</b>	<b>0.40</b>	<b>0.56</b>
22	R	592D226X_020R2T	4.4	6	0.28	0.73
22	T	592D226X_020T2T	4.4	6	0.60	0.37
22*	<b>U*</b>	<b>592D226X_020U2T*</b>	<b>4.4*</b>	<b>6*</b>	<b>0.30*</b>	<b>0.61*</b>
33	<b>R</b>	<b>592D336X_020R2T</b>	<b>6.6</b>	<b>6</b>	<b>0.28</b>	<b>0.73</b>
33*	<b>V*</b>	<b>592D336X_020V2T*</b>	<b>6.6*</b>	<b>6*</b>	<b>0.26*</b>	<b>0.73*</b>
<b>25 WVDC @ + 85°C, SURGE = 33 V . . . 17 WVDC @ + 125°C, SURGE = 20 V</b>						
2.2	<b>A</b>	<b>592D225X_025A2T</b>	<b>0.6</b>	<b>6</b>	<b>8.00</b>	<b>0.09</b>
2.2	B	592D225X_025B2T	0.6	6	6.00	0.12
3.3	<b>B</b>	<b>592D335X_025B2T</b>	<b>0.8</b>	<b>6</b>	<b>5.60</b>	<b>0.12</b>
3.3	C	592D335X_025C2T	0.8	6	2.00	0.22
4.7	C	592D475X_025C2T	1.2	6	1.60	0.25
6.8	<b>C</b>	<b>592D685X_025C2T</b>	<b>1.7</b>	<b>6</b>	<b>1.50</b>	<b>0.26</b>
6.8	D	592D685X_025D2T	1.7	6	1.30	0.31
10	<b>B</b>	<b>592D106X_025B2T</b>	<b>2.5</b>	<b>6</b>	<b>2.00</b>	<b>0.115</b>
10	<b>D</b>	<b>592D106X_025D2T</b>	<b>2.5</b>	<b>6</b>	<b>1.20</b>	<b>0.32</b>
10	R	592D106X_025R2T	2.5	6	0.48	0.56
15	<b>R</b>	<b>592D156X_025R2T</b>	<b>3.8</b>	<b>6</b>	<b>0.40</b>	<b>0.61</b>
15*	<b>U*</b>	<b>592D156X_025U2T*</b>	<b>3.8*</b>	<b>6*</b>	<b>0.40*</b>	<b>0.52*</b>
22*	<b>U*</b>	<b>592D226X_025U2T*</b>	<b>5.5*</b>	<b>6*</b>	<b>0.30*</b>	<b>0.68*</b>
22*	<b>V*</b>	<b>592D226X_025V2T*</b>	<b>5.5*</b>	<b>6*</b>	<b>0.30*</b>	<b>0.68*</b>

\*Preliminary values, contact factory for availability. For 10% tolerance, specify "9"; for 20% tolerance, change to "0". **Extended range ratings are in bold print.**

\*Voltage range under development.




**STANDARD / EXTENDED RATINGS**


CAPACITANCE (μF)	CASE CODE	PART NUMBER	Max. DCL @ + 25°C (μA)	Max. DF @ + 25°C 120 Hz (%)	Max. ESR @ + 25°C 100kHz (Ohms)	Max. RIPPLE 100kHz I <sub>rms</sub> (Amps)
35 WVDC @ + 85°C, SURGE = 46 V . . . 23 WVDC @ + 125°C, SURGE = 28 V						
1	A	592D105X_035A2T	0.5	4	10.0	0.08
1	B	592D105X_035B2T	0.5	4	6.50	0.11
1.5	B	592D155X_035B2T	0.5	4	4.2	0.14
2.2*	B*	592D225X_035B2T*	0.8*	6*	6.00*	0.12*
2.2	C	592D225X_035C2T	0.8	6	3.50	0.17
3.3	C	592D335X_035C2T	1.2	6	3.20	0.18
3.3	D	592D335X_035D2T	1.2	6	2.10	0.24
4.7	R	592 D475X_035R2T	1.6	6	1.30	0.34
6.8	D	592 D685X_035D2T	2.4	6	1.30	0.31
6.8	R	592D685X_035R2T	2.4	6	1.20	0.35
10	R	592D106X_035R2T	3.5	6	1.20	0.35

**TYPICAL CURVES OF ESR - AS A FUNCTION OF FREQUENCY**


"A" Case

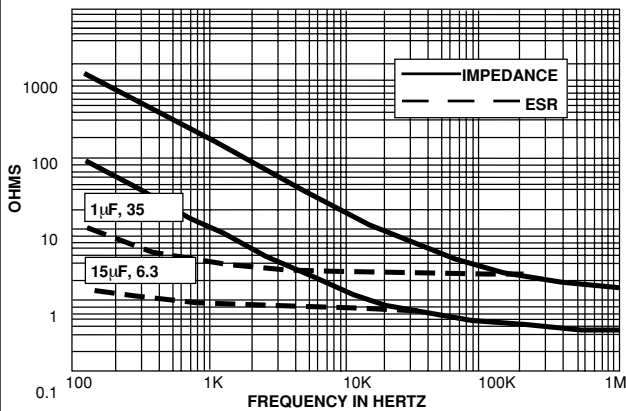


"B" Case

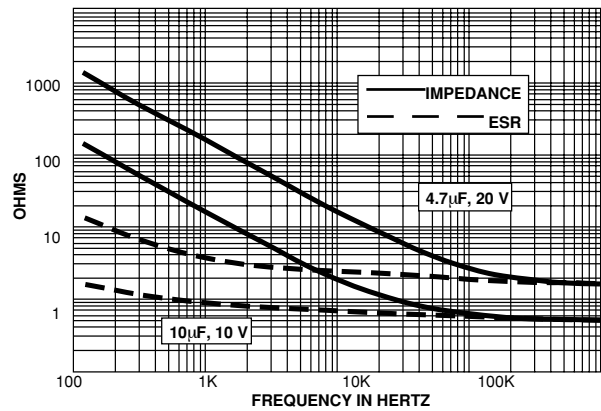

"C" Case

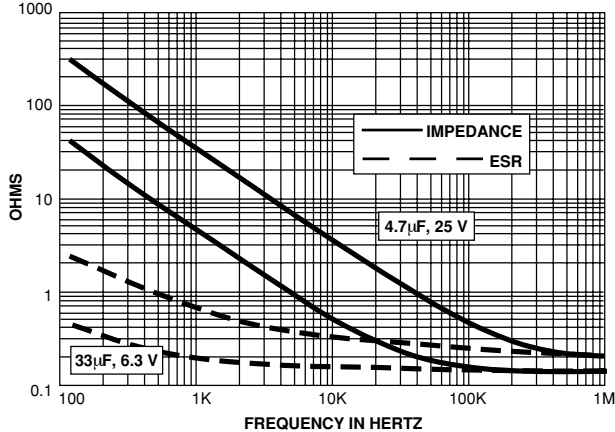


"D" Case

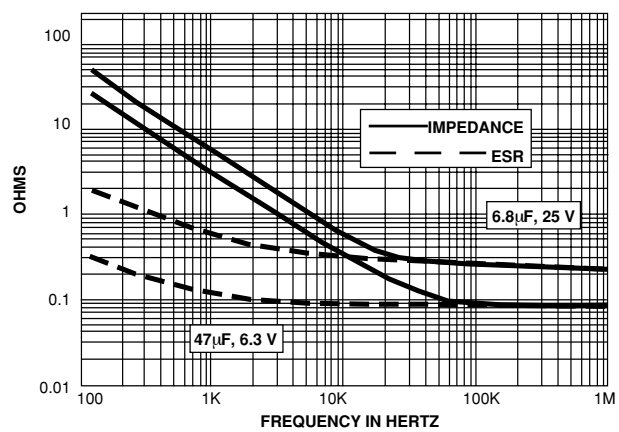


**TYPICAL CURVES @ + 25°C, IMPEDANCE AND ESR VS FREQUENCY**


"R" Case

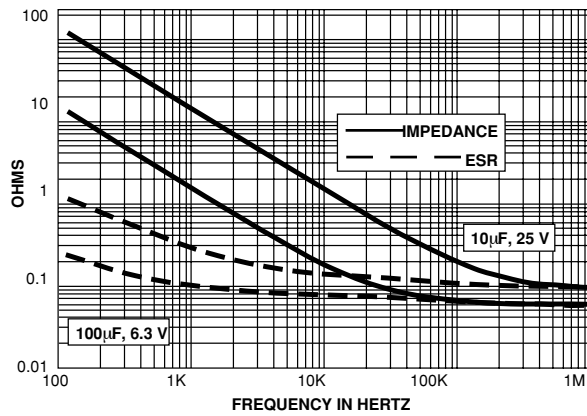


"S" Case

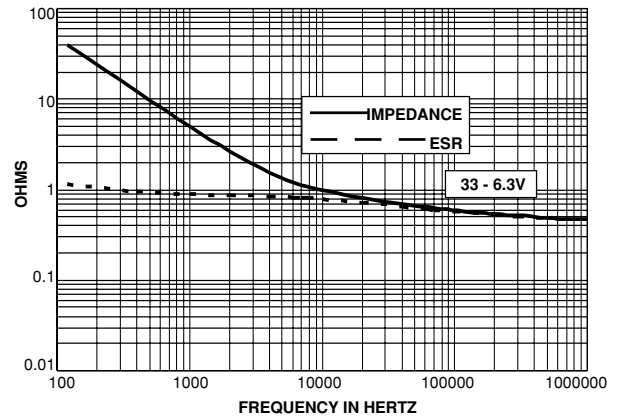


592D 1500-4V X CASE ESR/IMPEDANCE VS FREQUENCY

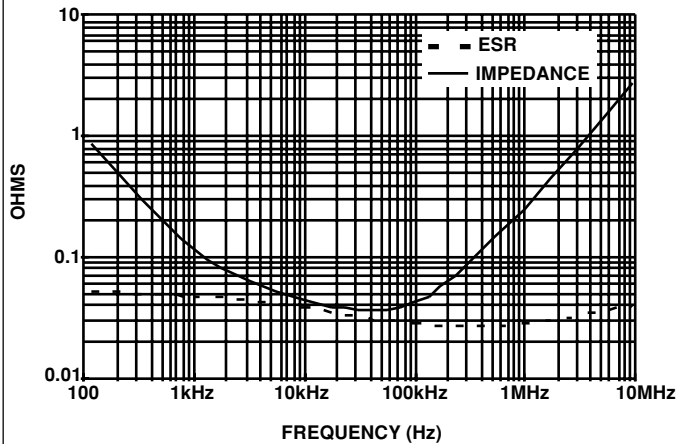


592D 1500-6.3V Y CASE ESR/IMPEDANCE VS FREQUENCY

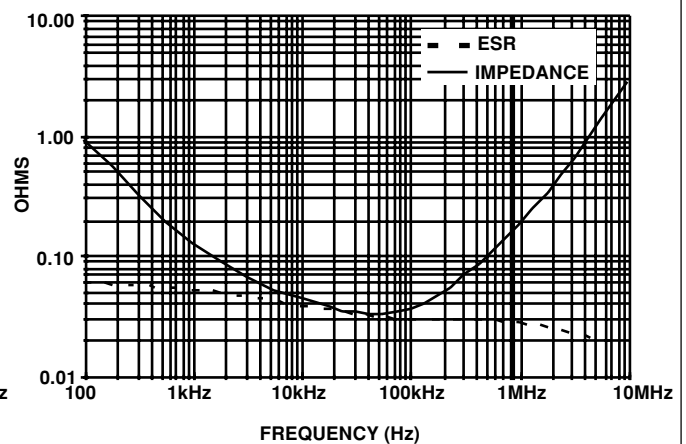

592D 1000-6.3V X CASE ESR/IMPEDANCE VS FREQUENCY

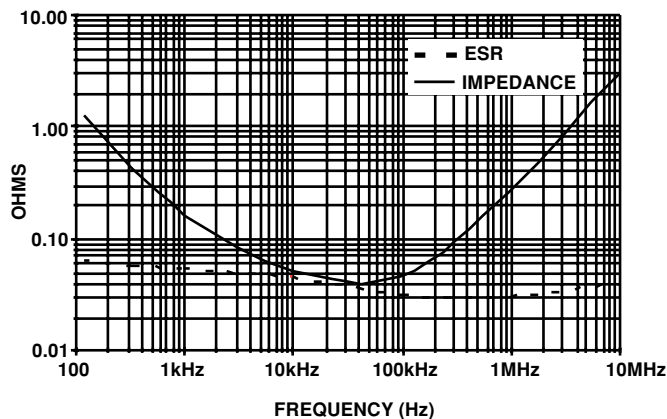

592D 2200-4V Y CASE ESR/IMPEDANCE VS FREQUENCY

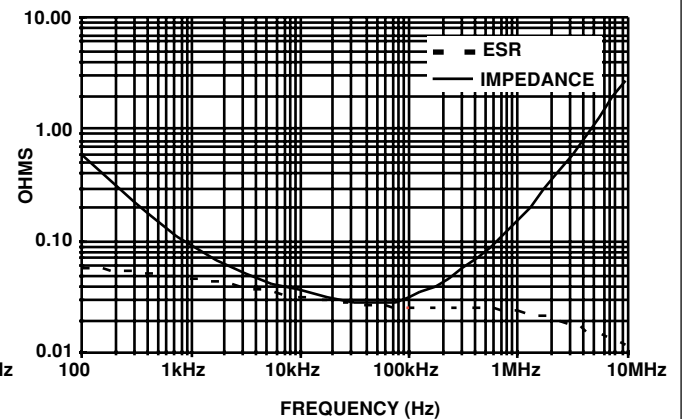

## PERFORMANCE CHARACTERISTICS

1. **Operating Temperature:** Capacitors are designed to operate over the temperature range - 55°C to + 85°C.

1.1 Capacitors may be operated to + 125°C with voltage derating to two-thirds the + 85°C rating.

+ 85°C Rating		+ 125°C Rating	
Working Voltage (V)	Surge Voltage (V)	Working Voltage (V)	Surge Voltage (V)
4	5.2	2.7	3.4
6.3	8	4	5
10	13	7	8
16	20	10	12
20	26	13	16
25	32	17	20
35	46	23	28

2. **DC Working Voltage:** The DC working voltage is the maximum operating voltage for continuous duty at the rated temperature.

3. **Surge Voltage:** The surge DC rating is the maximum voltage to which the capacitors may be subjected under any conditions, including transients and peak ripple at the highest line voltage. 592D228X\_6R3X2T and 592D338X\_6R3V2T, not surge voltage tested.

3.1 **Surge Voltage Test:** Capacitors shall withstand the surge voltage applied in series with a 33 ohm  $\pm$  5% resistor at the rate of one-half minute on, one-half minute off, at + 85°C, for 1000 successive test cycles.

3.2 Following the surge voltage test, the dissipation factor and the leakage current shall meet the initial requirements; the capacitance shall not have changed more than  $\pm$  10%.

4. **Capacitance Tolerance:** The capacitance of all capacitors shall be within the specified tolerance limits of the normal rating.

4.1 Capacitance measurements shall be made by means of polarized capacitance bridge. The polarizing voltage shall be of such magnitude that there shall be no reversal of polarity due to the AC component. The maximum voltage applied to capacitors during measurement shall be 2 volts rms at 120 Hz at +25°C. If the AC voltage applied is less than one-half volt rms, no DC bias is required. Accuracy of the bridge shall be within  $\pm$  2%.

5. **Capacitance Change With Temperature:** The capacitance change with temperature shall not exceed the following percentage of the capacitance measured at + 25°C:

- 55°C	+ 85°C	+ 125°C
- 10%	+ 10%	+ 12%


6. **Dissipation Factor:** The dissipation factor, determined from the expression  $2\pi fRC$ , shall not exceed values listed in the Standard Ratings Table.

6.1 Measurements shall be made by the bridge method at, or referred to, a frequency of 120 Hz and a temperature of + 25°C.

7. **Leakage Current:** Capacitors shall be stabilized at the rated temperature for 30 minutes. Rated voltage shall be applied to capacitors for 5 minutes using a steady source of power (such as a regulated power supply) with 1000 ohm resistor connected in series with the capacitor under test to limit the charging current. Leakage current shall then be measured.

*Note that the leakage current varies with temperature and applied voltage. See graph below for the appropriate adjustment factor.*

### TYPICAL LEAKAGE CURRENT FACTOR RANGE

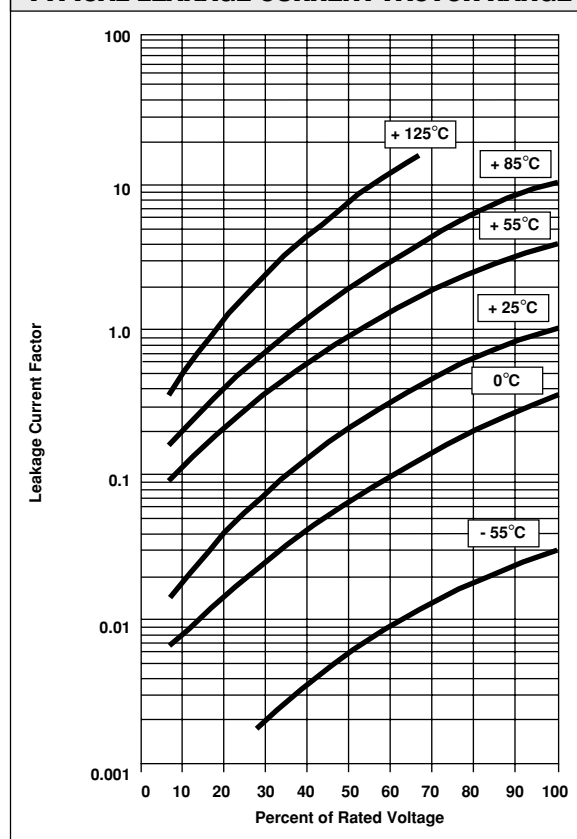

**PERFORMANCE CHARACTERISTICS** (Continued)

- 7.1 **At + 25°C**, the leakage current shall not exceed the value listed in the Standard Ratings Table.
- 7.2 **At + 85°C**, the leakage current shall not exceed 10 times the value listed in the Standard Ratings Table.
- 7.3 **At + 125°C**, the leakage current shall not exceed 12 times the value listed in the Standard Ratings Table.
8. **Equivalent Series Resistance:** Measurements shall be made by the bridge method at, or referred to, a frequency of 100 KHz and a temperature of + 25°C.
- 8.1 The Equivalent Series Resistance shall not exceed the value listed in the Standard Ratings Table.
9. **Life Test:** Capacitors shall withstand rated DC voltage applied at + 85°C for 2000 hours or derated DC voltage applied at + 125°C for 1000 hours.
- 9.1 Following the life test, the dissipation factor and leakage shall meet the initial requirement; the capacitance change shall not exceed ± 10% of the initial value.
- 10 **Humidity Test:** Capacitors shall withstand 1000 hours at + 40°C, 90% to 95% relative humidity, with no voltage applied
- 10.1 Following the humidity test, capacitance change shall not exceed ± 10% of the initial value, dissipation factor shall not exceed 150% of the initial requirement; leakage current shall not exceed 200% of the initial requirement at + 25°C
11. **Solderability:** Capacitors will meet the solderability requirements of ANSI/J-STD-002, test B category 1.
12. **Resistance to Soldering Heat:** Capacitors mounted on a substrate will withstand + 260°C for 5 seconds.
- 12.1 Following the resistance to soldering heat test, capacitance, dissipation factor and DC leakage current shall meet the initial requirement.
13. **Marking:** The small body area of these capacitors does not allow elaborate marking schemes. All required information is present on the carton or package in which the parts are shipped; in addition, part number, quantity and data code are indicated on the reels.
14. **Terminal Strength:** Per IEC-384-3, minimum of 5N shear force.
15. **Environmental:** Mercury, CFC and ODS materials are not used in the manufacture of these capacitors.
16. **Flammability:** Encapsulant materials meet UL94 V0
17. **Capacitor Failure Mode:** The predominant failure mode for solid tantalum capacitors is increased leakage current resulting in a shorted circuit. Capacitor failure may result from excess forward or reverse DC voltage, surge current, ripple current, thermal shock or excessive temperature.

The increase in leakage is caused by a breakdown of the Ta<sub>2</sub>O<sub>5</sub> dielectric. For additional information on leakage failure of solid tantalum chip capacitors, refer to Vishay Sprague Technical Paper, "Leakage Failure Mode in Solid Tantalum Chip Capacitors."

**GUIDE TO APPLICATION**

- 1.0 **Recommended rated working voltage guidelines:** (-55°C to + 85°C)

Application Voltage (V)	Recommended Capacitor Voltage Rating (V)
2.5	4
4	6.3
5	8
6	10
10	16
12	20
18	25
24	35

2. **A-C Ripple Current:** The maximum allowable ripple current shall be determined from the formula:

$$I_{\text{rms}} = \sqrt{\frac{P}{R_{\text{ESR}}}}$$

where,

P = Power Dissipation in Watts @ + 25°C as given in the table in Paragraph Number 6.0 (Power Dissipation)

R<sub>ESR</sub> = The capacitor Equivalent Series Resistance at the specified frequency.

3. **A-C Ripple Voltage:** The maximum allowable ripple voltage shall be determined from the formula:

$$V_{\text{rms}} = Z \sqrt{\frac{P}{R_{\text{ESR}}}}$$

or, from the formula:

$$V_{\text{rms}} = I_{\text{rms}} \times Z$$

where,

P = Power Dissipation in Watts @ + 25°C as given in the table in Paragraph Number 6.0 (Power Dissipation).

R<sub>ESR</sub> = The capacitor Equivalent Series Resistance at the specified frequency.

Z = The capacitor impedance at the specified frequency.



**GUIDE TO APPLICATION** (Continued)

- 3.1** The sum of the peak AC voltage plus the applied DC voltage shall not exceed the DC voltage rating of the capacitor.
- 3.2** The sum of the negative peak AC voltage plus the applied DC voltage shall not allow a voltage reversal exceeding 10% of the DC working voltage at + 25°C.
- 4.0** **Reverse Voltage:** These capacitors are capable of withstanding peak voltages in the reverse direction equal to 10% of the DC rating or 1 volt maximum at +25°C and 5% of the DC voltage rating or 0.5 volt maximum at + 85°C.
- 5.0** **Temperature Derating:** If these capacitors are to be operated at temperatures above + 25°C, the permissible rms ripple current or voltage shall be calculated using the derating factors as shown:

Temperature	Derating Factor
+ 25°C	1.0
+ 85°C	0.9
+ 125°C	0.4

- 6.0** **Power Dissipation:** Power dissipation will be affected by the heat sinking capability of the mounting surface. Non-sinusoidal ripple current may produce heating effects which differ from those shown. It is important that the equivalent *I<sub>rms</sub>* value be established when calculating permissible operating levels. (Power dissipation calculated using + 25°C temperature rise.)

Case Code	Maximum Permissible Power Dissipation @ + 25°C (Watts) in free air
A	0.060
B	0.080
C	0.100
D	0.125
R	0.150
S	0.060
T	0.080
U	0.110
V	0.140
W	0.175
X	0.175
Y	0.180


- 7.0** **Printed Circuit Board Materials:** The capacitors are compatible with most commonly used printed circuit board materials (alumina substrates, FR4, FR5, G10, PTFE-fluorocarbon and porcelanized steel). If your desired board material is not shown there please contact the Tantalum Marketing Department for assistance in determining compatibility.

**8. Attachment:**

- 8.1** **Solder Paste:** The recommended thickness of the solder paste after application is 0.007" ± .001" [.178mm ± .025mm]. Care should be exercised in selecting the solder paste. The metal purity should be as high as practical. The flux (in the paste) must be active enough to remove the oxides formed on the metallization prior to the exposure to soldering heat.

- 8.2** **Soldering:** Capacitors can be attached by conventional soldering techniques - convection, infrared reflow, wave soldering and hot plate methods.


The Soldering Profile chart shows typical recommended time/temperature conditions for soldering. Attachment with a soldering iron is not recommended due to the difficulty of controlling temperature and time at temperature. The soldering iron must never come in contact with the capacitor.

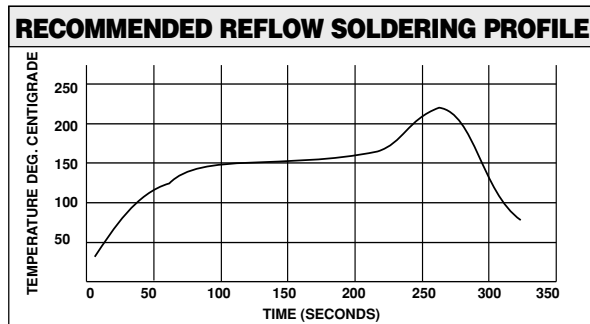

- 9.0** **Recommended Mounting Pad Geometries:** The nib must have sufficient clearance to avoid electrical contact with other components. The width dimension indicated is the same as the maximum width of the capacitor. This is to minimize lateral movement.

**REFLOW SOLDER PADS\***



in inches [millimeters]

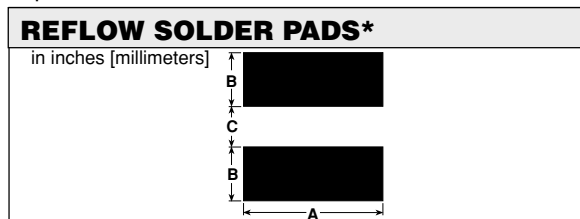

CASE CODE	WIDTH (A)	PAD METALIZATION	SEPARATION (C)
A	0.082 [2.1]	0.085 [1.7]	0.050 [1.3]
B	0.120 [3.5]	0.065 [1.7]	0.065 [1.7]
C	0.130 [3.5]	0.080 [2.3]	0.120 [3.1]
D	0.180 [4.6]	0.080 [2.3]	0.145 [3.7]
R	2.45 [8.3]	0.090 [2.3]	0.145 [3.7]
S	0.067 [1.7]	0.032 [0.8]	0.043 [1.1]
T	0.120 [3.5]	0.065 [1.7]	0.065 [1.7]
U	0.136 [3.5]	0.090 [2.3]	0.120 [3.1]
V	0.180 [4.6]	0.090 [2.3]	0.145 [3.7]
W	0.245 [8.3]	0.090 [2.3]	0.145 [3.7]
X	0.310 [7.9]	0.120 [3.0]	0.360 [9.2]
Y	0.310 [7.9]	0.120 [3.0]	0.360 [9.2]

\* Pads for B, C and D case codes are otherwise pad compatible with Type 293D, B, C and D case codes respectively.


- 10.0** **Cleaning (Flux Removal) After Soldering:** The 592D capacitors are compatible with all commonly used solvents such as TES, TMS, Prelete, Chlorethane, Terpene and aqueous cleaning media. Solvents containing methylene chloride or other epoxy solvents should be avoided since these will attack the epoxy encapsulation material.

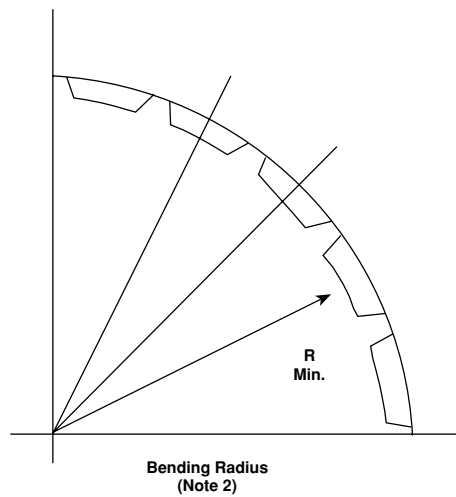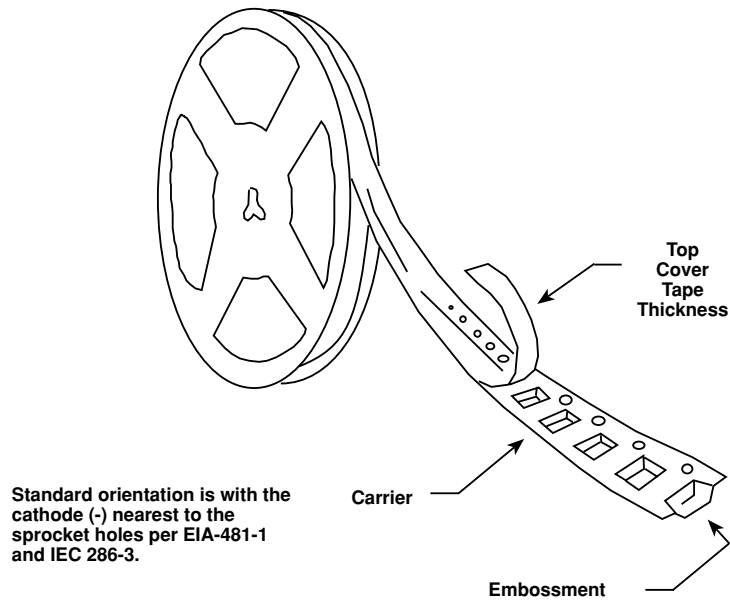**TAPE AND REEL PACKAGING** in inches [millimeters]


Case Code	Tape Width	Component Pitch	Units Per Reel	
			7" [178] Reel	13" [330] Reel
A	8mm	4mm	2500	10000
B	12mm	4mm	2000	8000
C	12mm	8mm	1000	4000
D	12mm	8mm	1000	4000
R	12mm	8mm	1000	4000
S	8mm	4mm	2500	10000
T	12mm	8mm	2000	8000
U	12mm	8mm	1000	4000
V	12mm	8mm	1000	4000
W	12mm	8mm	1000	2500
X	24mm	12mm	500	
Y	24mm	12mm	500	

**TAPE AND REEL PACKAGING** in inches [millimeters]

**Note:** Metric dimensions will govern. Dimensions in inches are rounded and for reference only.

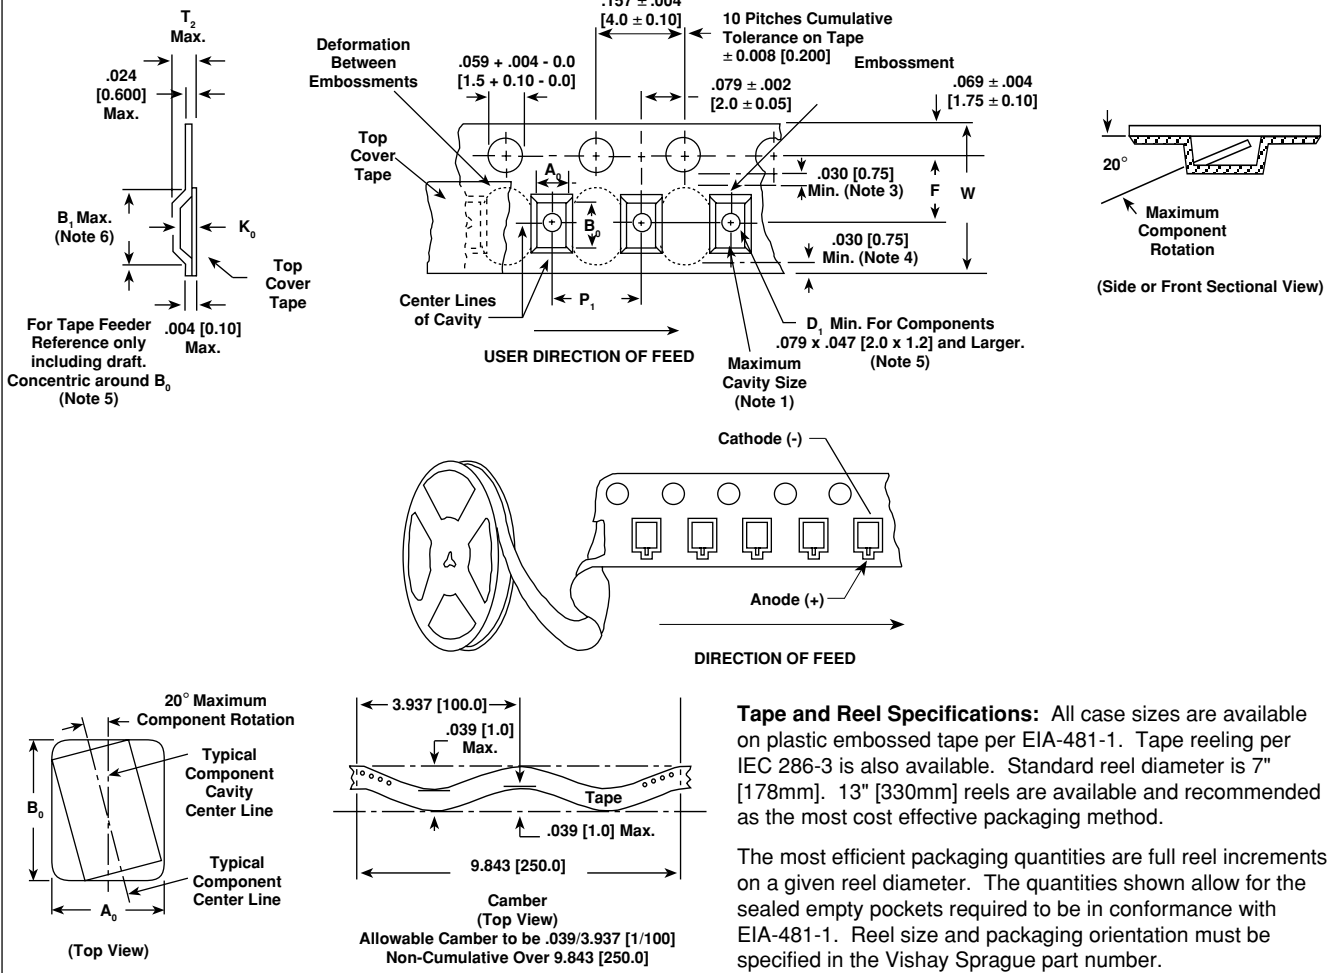

**Tape and Reel Specifications:** All case sizes are available on plastic embossed tape per EIA-481-1. Tape reeling per IEC 286-3 is also available. Standard reel diameter is 7" [178mm]. 13" [330mm] reels are available and recommended as the most cost effective packaging method.

The most efficient packaging quantities are full reel increments on a given reel diameter. The quantities shown allow for the sealed empty pockets required to be in conformance with EIA-481-1. Reel size and packaging orientation must be specified in the Vishay Sprague part number.

TAPE SIZE	B <sub>0</sub> (Max.) (Note 6)	D <sub>1</sub> (Min.) (Note 5)	F	P <sub>1</sub>	R (Min.) (Note 2)	T <sub>2</sub> (Max.)	W	A <sub>0</sub> B <sub>0</sub> K <sub>0</sub>
8mm	0.179 [4.55]	0.039 [1.0]	0.138 ± 0.002 [3.5 ± 0.05]	0.157 ± 0.004 [4.0 ± 0.10]	0.984 [25.0]	0.098 [2.5]	0.315 + .012 - .004 [8.0 + 0.3 - 0.1]	(Note 1)
12mm	0.323 [8.2]	0.059 [1.5]	0.217 ± 0.002 [5.5 ± 0.05]	0.157 ± 0.004 [4.0 ± 0.10]	1.181 [30.0]	0.256 [6.5]	0.472 ± 0.012 [12.0 ± 0.30]	
12mm Double Pitch	0.323 [8.2]	0.059 [1.5]	0.217 ± 0.002 [5.5 ± 0.05]	0.315 ± 0.004 [8.0 ± 0.10]	1.181 [30.0]	0.256 [6.5]	0.472 ± 0.012 [12.0 ± 0.30]	
24mm	0.791 [20.1]	0.059 [1.5]	0.453 ± 0.04 [11.5 ± 0.03]	0.472 ± 0.004 [12.0 ± 0.10]	1.181 [30.0]	0.103 [2.6]	0.945 ± 0.012 [24.0 ± 0.03]	

**Notes:**

- A<sub>0</sub>B<sub>0</sub>K<sub>0</sub> are determined by the maximum dimensions to the ends of the terminals extending from the component body and/or the body dimensions of the component. The clearance between the ends of the terminals or body of the component to the sides and depth of the cavity (A<sub>0</sub>B<sub>0</sub>K<sub>0</sub>) must be within .002" [0.05mm] minimum and .020" [0.50mm] maximum. The clearance allowed must also prevent rotation of the component within the cavity of not more than 20 degrees.
- Tape with components shall pass around radius "R" without damage. The minimum trailer length may require additional length to provide R minimum for 12mm embossed tape for reels with hub diameters approaching N minimum.
- This dimension is the flat area from the edge of the sprocket hole to either the outward deformation of the carrier tape between the embossed cavities or to the edge of the cavity whichever is less.
- This dimension is the flat area from the edge of the carrier tape opposite the sprocket holes to either the outward deformation of the carrier tape between the embossed cavity or to the edge of the cavity whichever is less.
- The embossment hole location shall be measured from the sprocket hole controlling the location of the embossment. Dimensions of embossment location and hole location shall be applied independent of each other.
- B<sub>1</sub> dimension is a reference dimension for tape feeder clearance only.