

## LQ64D343

Color TFT-LCD Module  
(FA/POS/Measuring instruments)

### Features

- 16 cm [6.4"] VGA format
- Built-in long life CCFT backlight (50 000 h)
- Wide viewing angle  
(Horizontal: 120° Vertical: 90°)
- Anti glare treatment
- High brightness (300 cd/m<sup>2</sup>)
- Low reflectance


### Specifications

Parameter		Unit
Display size	16 [6.4]	cm ["]
Dot format (H x V)	640 x RGB x 480	dot
Dot pitch (H x V)	0.068 x 0.202	mm
Active area (H x V)	130.6 x 97.0	mm
Color	262 144	-
Input signal	6-bit Digital RGB	-
Viewing direction	6:00	-
Backlight type	2CCFT(E)	-

Parameter		Unit
Brightness	300	cd/m <sup>2</sup>
Contrast ratio	300 : 1	-
Power consumption	5.57	W
Outline dimensions (W x H x D)	175.0 x 126.5 x 12.0	mm
Weight	290	g
Operating temperature	0 to +55	°C
Storage temperature	-25 to +70	°C

### Outline Dimensions

unit : mm

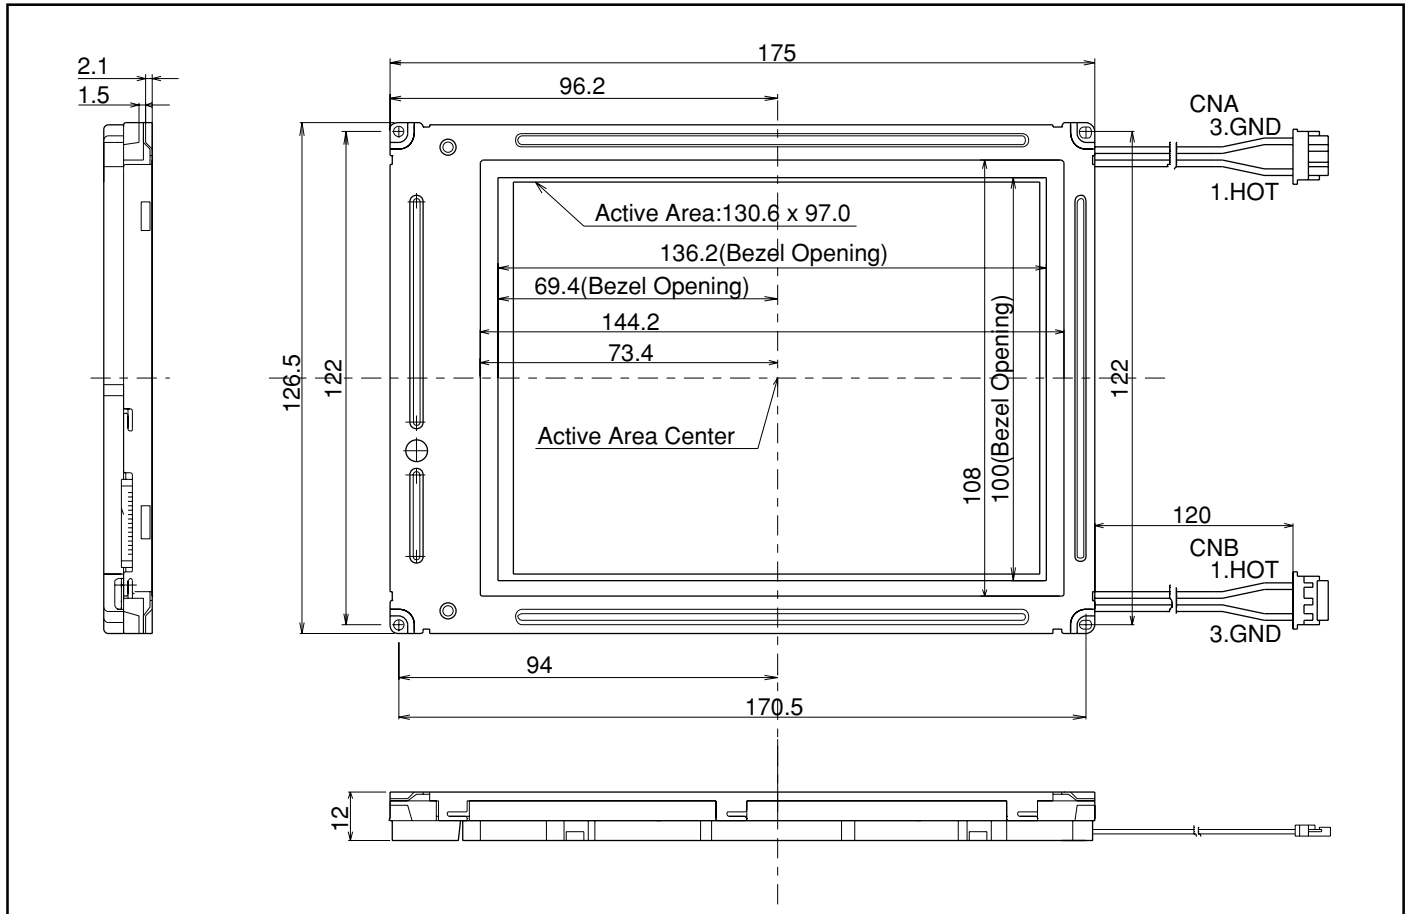

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. Specifications are subject to change without notice for improvement.